

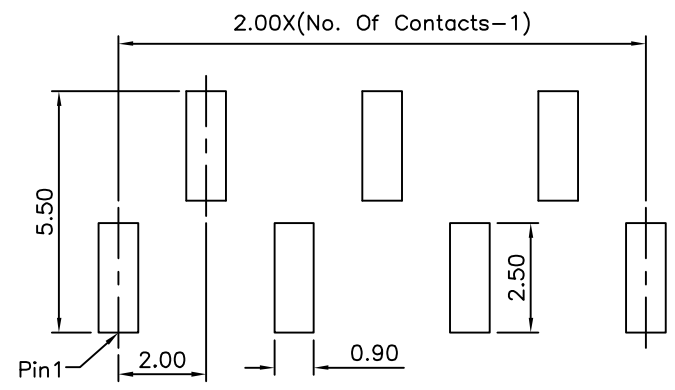
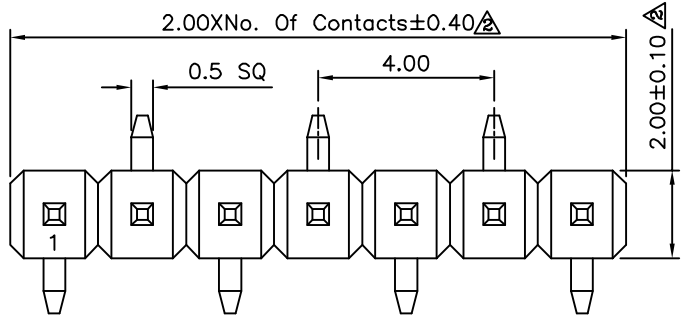


**△△ SPECIFICATION**

Current:1A  
 Dielectric Strength:1000V AC Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Copper Alloys,Gold Flash Over Nickel  
 No. Of Contacts:2~40 Contacts  
 RoHS Compliant

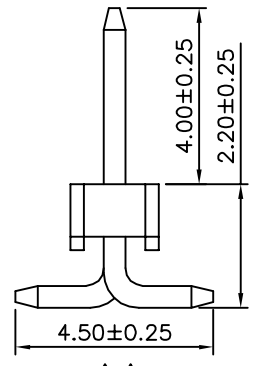

△△Recommended P.C.B. Layout

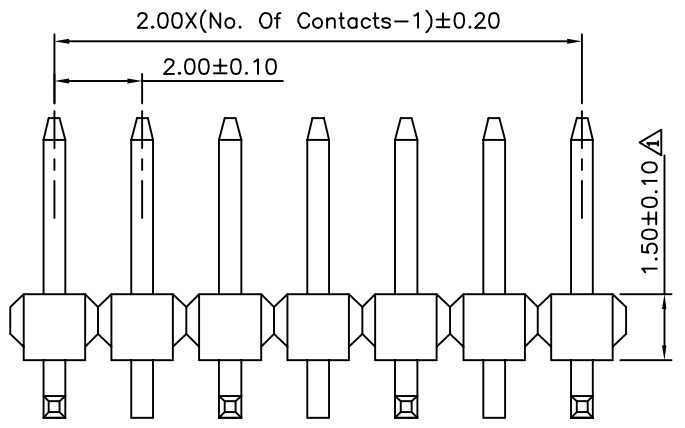

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
15016		EMILY		
		CHECKED BY HZF		
		DRAWING BY YBL		
SCALE	NONE	REV.	A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	HZF	01/14/2014
△A2		Modify Data	HZF	12/18/2012
△A1		Modify Data	HZF	09/03/2009
△A0		NEW RELEASE	SHIN	04/15/2007