File No. 182EA14226 SHEET 1/1

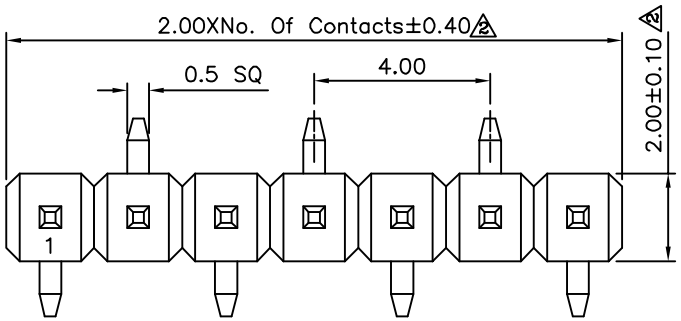


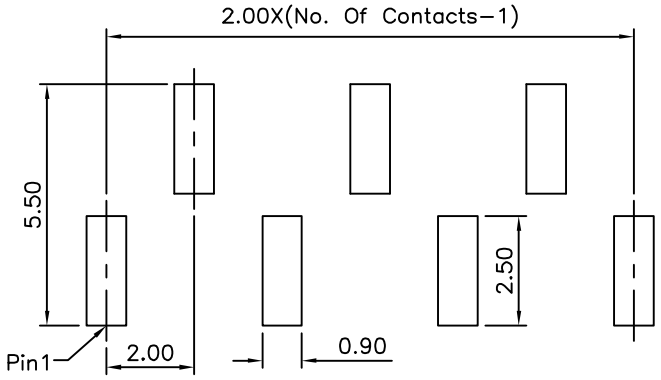


1 Recommended P.C.B. Layout

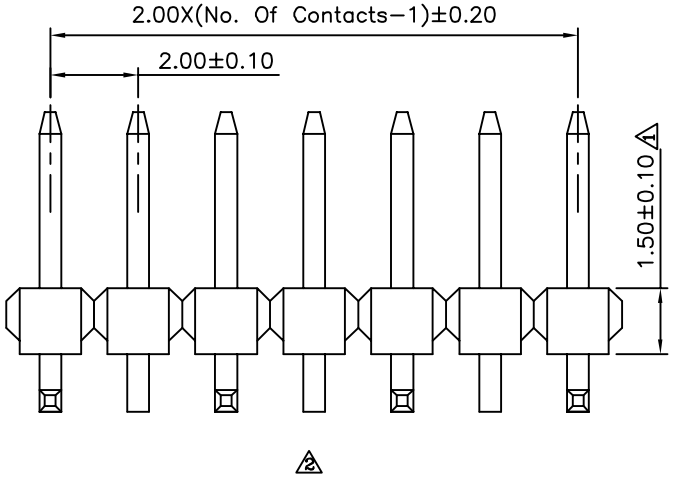


2

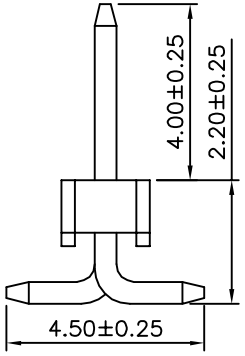


1 2

2 1 SPECIFICATION

Current:1A
Dielectric Strength:1000V AC Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:−55°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Copper Alloys,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

| | | |
|---|---|---|
| DRAWING No. | 15019 | |
| APPROVED BY | EMILY | |
| CHECKED BY | HZF | |
| DRAWING BY | YBL | |
| SCALE | NONE | |
| REV. | A3 | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | .X ±0.38<br>.XX ±0.25<br>ANG. ±5° | |
| UNIT | mm | |

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 3 | A3 | Modify Data | HZF | 01/14/2014 |
| 2 | A2 | Modify Data | HZF | 12/18/2012 |
| 1 | A1 | Modify Data | HZF | 09/03/2009 |
| 0 | A0 | NEW RELEASE | SHIN | 04/15/2007 |