
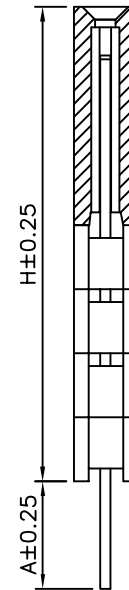
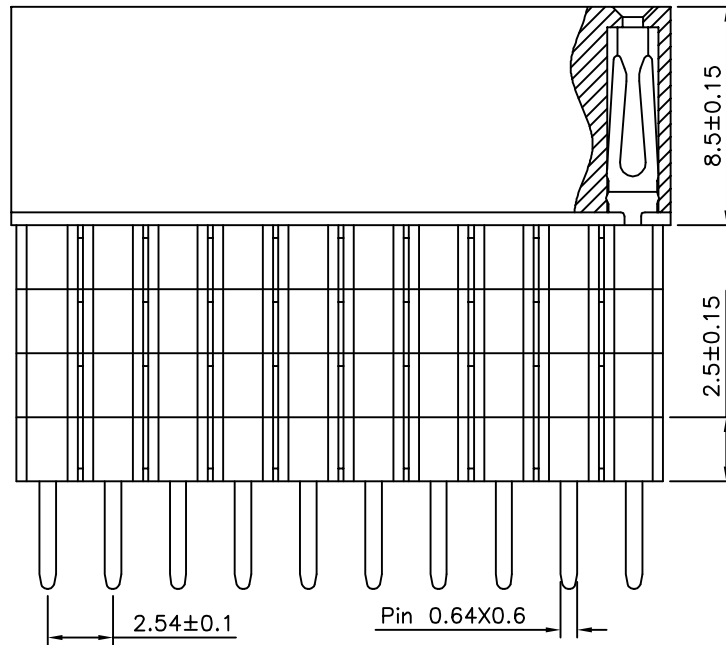


Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance ± 0.05)

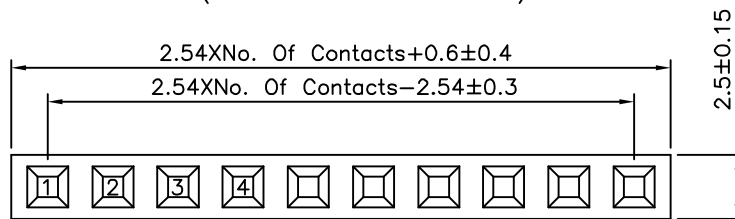

SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15305

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY HAO

REV. A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ± 0.25 X." $\pm 2^{\circ}$
 .X ± 0.20 .X" $\pm 1.5^{\circ}$
 .XX ± 0.15 .XX" $\pm 1^{\circ}$
 .XXX ± 0.10 .XXX" $\pm 0.5^{\circ}$

UNIT mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE 12/11/2014