




Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

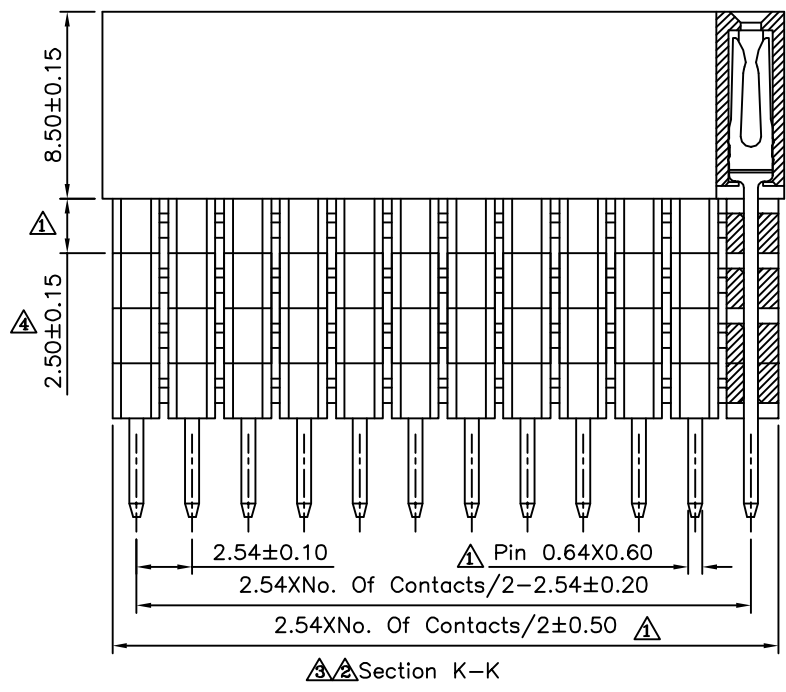

△ SPECIFICATION
 Current Rating:3.0 Amp
 Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0),Black
 RoHS Compliant

△△ Series No.	Plastic Q'ty	H	A △
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.67	4.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
15424		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A4	NO. REV.

△ A4	Modify Data	HZF	10/23/2012
△ A3	Modify Data	HZF	06/07/2012
△ A2	Modify Data	HZF	02/17/2011
△ A1	UPDATE DIMENSION	HZF	04/15/2008
△ A0	NEW RELEASE	SHIN	09/02/2007
NO. REV.	REVISIONS	CHK	DATE