

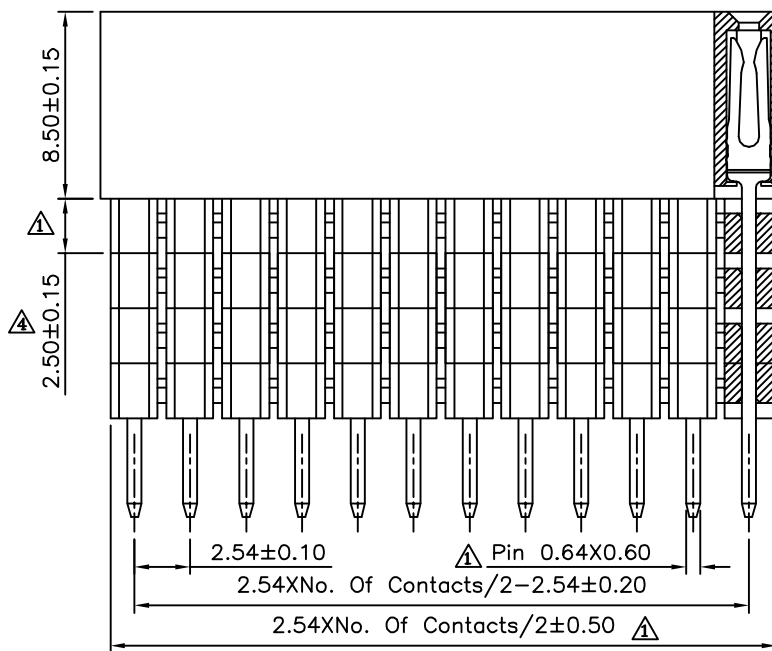


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

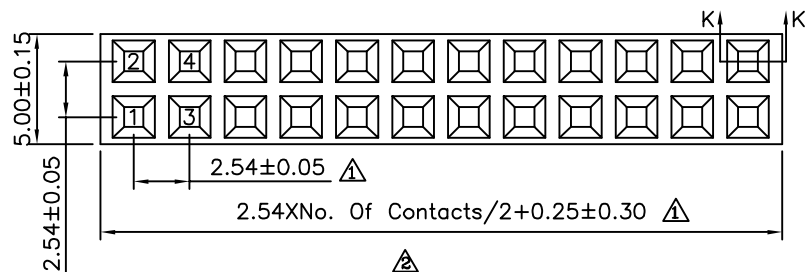

Section K-K

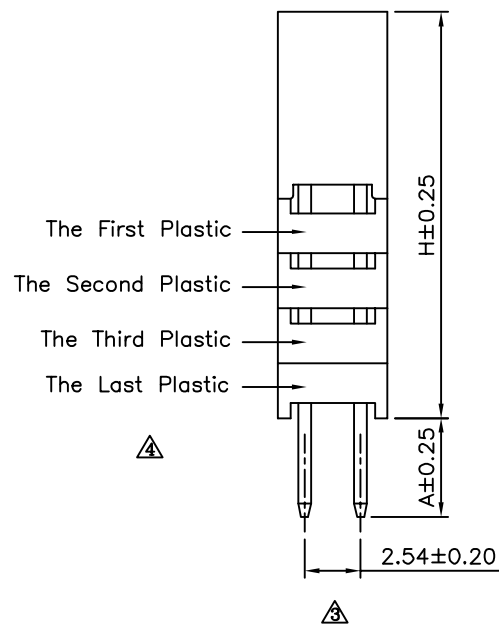

SPECIFICATION

- Current Rating:3.0 Amp
- Withstand Voltage:1000V AC/DC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Contact:Brass,Gold Plated Over Nickel
- Insulator:PBT+30%G.F.(UL94V-0),Black
- RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.67	4.60

DRAWING No.

15460

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A4		Modify Data	HZF	10/23/2012
A3		Modify Data	HZF	06/07/2012
A2		Modify Data	HZF	02/17/2011
A1		UPDATE DIMENSION	HZF	04/15/2008
A0		NEW RELEASE	SHIN	09/02/2007

SCALE

NONE

REV.

A4

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.