




Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance±0.05)

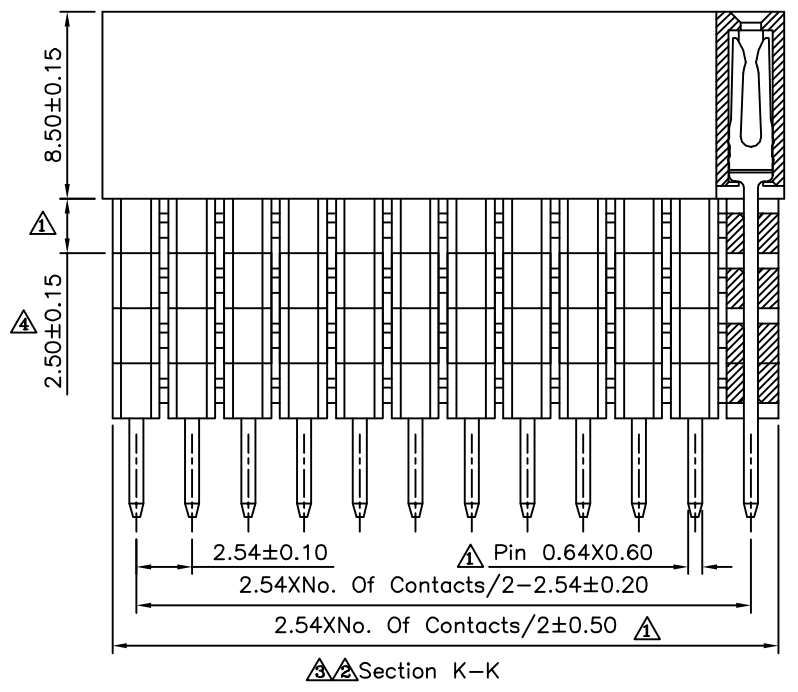

**△ SPECIFICATION**  
 Current Rating:3.0 Amp  
 △ Withstand Voltage:1000V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 RoHS Compliant

| △△ Series No. | Plastic Q'ty | H     | A △  |
|---------------|--------------|-------|------|
| 0196          | 1            | 11.05 | 2.30 |
| 0196          | 1            | 11.05 | 7.35 |
| 0196          | 1            | 11.05 | 12.2 |
| 0197          | 2            | 13.59 | 4.85 |
| 0197          | 2            | 13.59 | 9.65 |
| 0198          | 3            | 16.13 | 2.30 |
| 0198          | 3            | 16.13 | 7.10 |
| 0199          | 4            | 18.67 | 4.60 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|             |      |             |    |  |
|-------------|------|-------------|----|--|
| DRAWING No. |      | APPROVED BY |    | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>.X ±0.40<br>.XX ±0.25<br>.XXX ±0.15<br>ANG. ±3° |
| 15470       |      | EMILY       |    |  |
|             |      | HZF         |    |  |
|             |      | DRAWING BY  |    | UNIT mm  |
|             |      | SONG        |    |  |
| SCALE       | NONE | REV.        | A4 |  |

| NO.  | REV. | REVISIONS        | CHK  | DATE       |
|------|------|------------------|------|------------|
| △ A4 |      | Modify Data      | HZF  | 10/23/2012 |
| △ A3 |      | Modify Data      | HZF  | 06/07/2012 |
| △ A2 |      | Modify Data      | HZF  | 02/17/2011 |
| △ A1 |      | UPDATE DIMENSION | HZF  | 04/15/2008 |
| △ A0 |      | NEW RELEASE      | SHIN | 09/02/2007 |