



SPECIFICATION




⚠️⚠️ Current Rating: 1.0 Amp
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Operation Temperature: -40°C ~ +105°C
 Housing: PA6T+30%G.F.(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

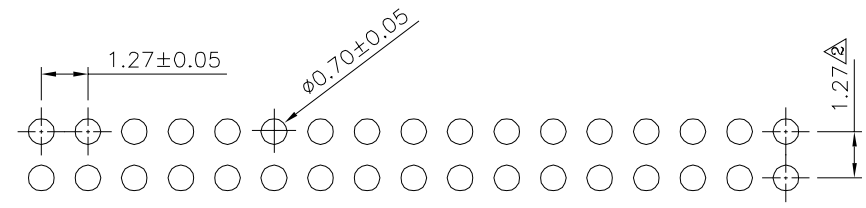

Recommended P.C.B. Layout

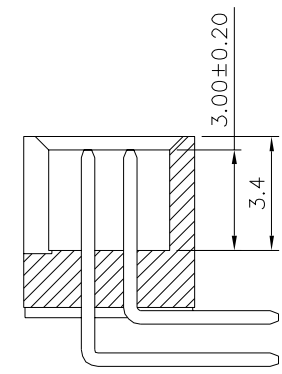

Section A-A

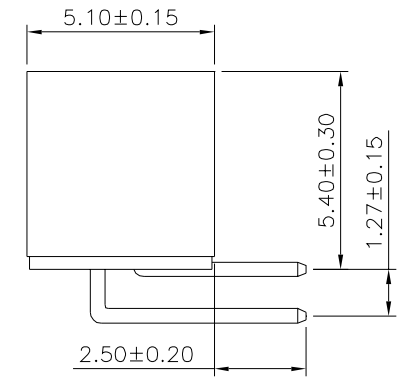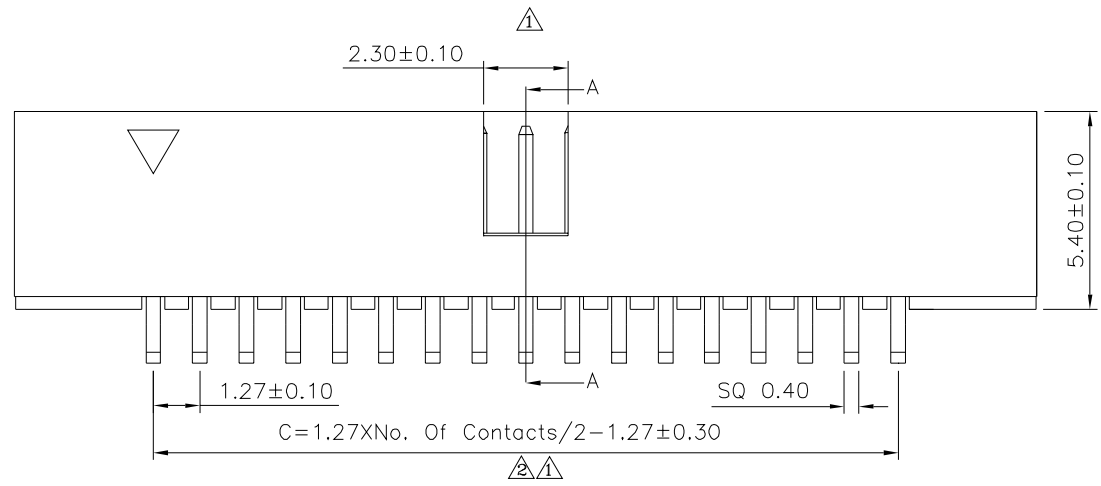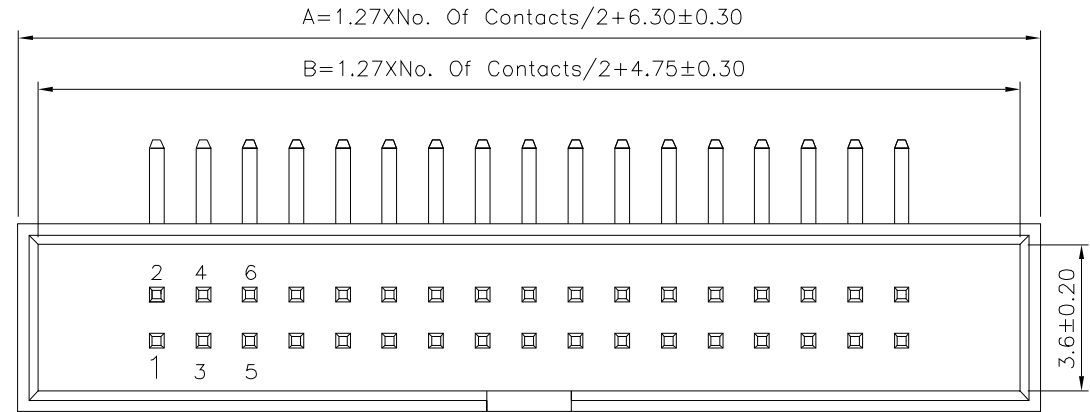

Pin	A	B	C
6	10.11	8.56	2.54
10	12.65	11.10	5.08
12	13.92	12.37	6.35
14	15.19	13.64	7.62
16	16.46	14.91	8.89
20	19.00	17.45	11.43
24	21.54	19.99	13.97
26	22.81	21.26	15.24
28	24.08	22.53	16.51
30	25.35	23.80	17.78
34	27.89	26.34	20.32
40	31.70	30.15	24.13
44	34.24	32.69	26.67
50	38.05	36.50	30.48
60	44.40	42.85	36.83
64	46.94	45.39	39.37
68	49.48	47.93	41.91
80	57.10	55.55	49.53
100	69.80	68.25	62.23

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.30 .XX ± 0.20
15480		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠️	A2	Modify Data	HZF	06/13/2020
⚠️	A1	Modify Data	HZF	01/09/2019
⚠️	A0	NEW RELEASE	HZF	05/06/2018