

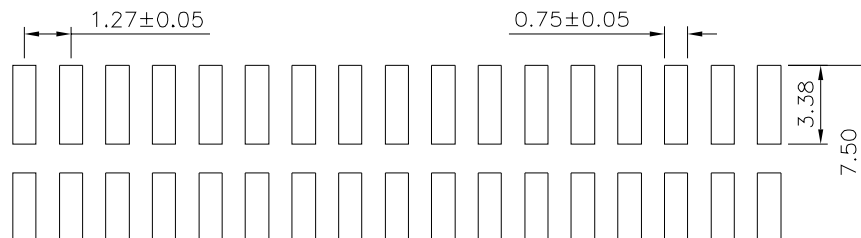
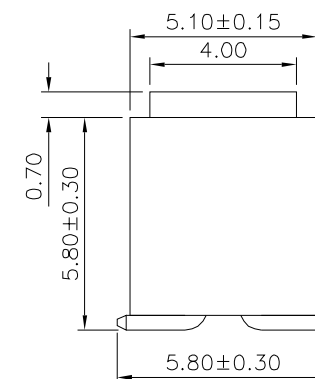


SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA9T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

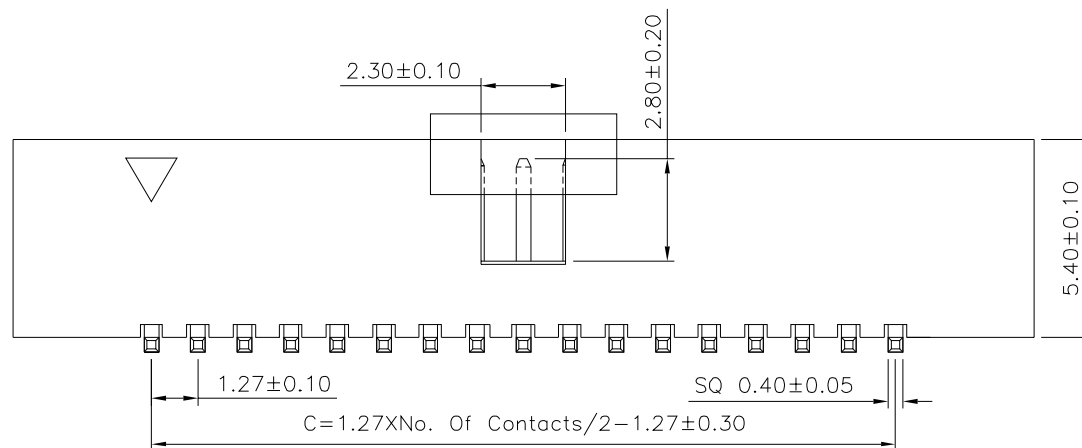

Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)

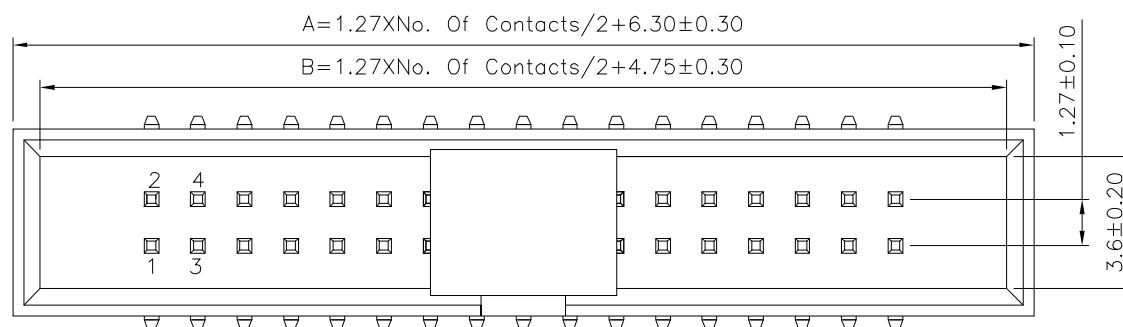

Pin	A	B	C
6	10.11	8.56	2.54
10	12.65	11.10	5.08
12	13.92	12.37	6.35
14	15.19	13.64	7.62
16	16.46	14.91	8.89
20	19.00	17.45	11.43
24	21.54	19.99	13.97
26	22.81	21.26	15.24
28	24.08	22.53	16.51
30	25.35	23.80	17.78
34	27.89	26.34	20.32
40	31.70	30.15	24.13
44	34.24	32.69	26.67
50	38.05	36.50	30.48
60	44.40	42.85	36.83
64	46.94	45.39	39.37
68	49.48	47.93	41.91
80	57.10	55.55	49.53
100	69.80	68.25	62.23

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15494

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. AO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20

UNIT mm

NEW RELEASE HZF 09/16/2016

NO. REV. REVISIONS CHK DATE