

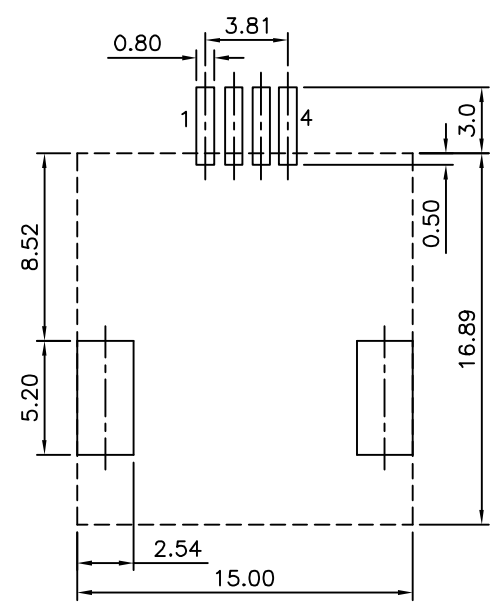
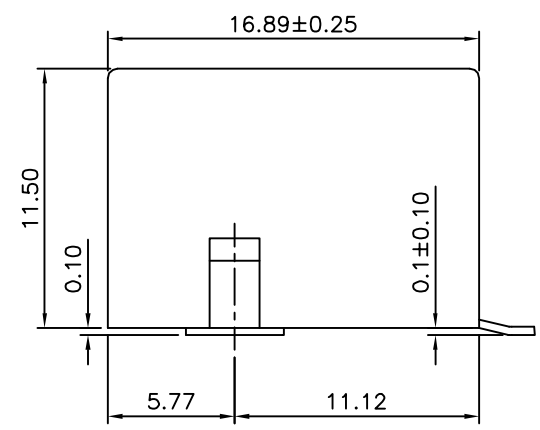
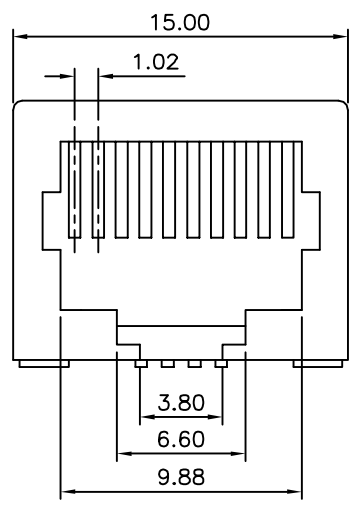


△ SPECIFICATION
 Housing:PA9T(UL94V-0),Black
 Insert Housing:PA46(UL94V-0),
 Nonmetallic Pearl Color
 Contacts:Phosphor Bronze
 Gold Plated 6u" On Contact Area,Gold
 Flash On Other Area,Over Nickel
 Hold Down:Copper Alloy,Tin Plated
 Cavity Confirms To FCC Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant

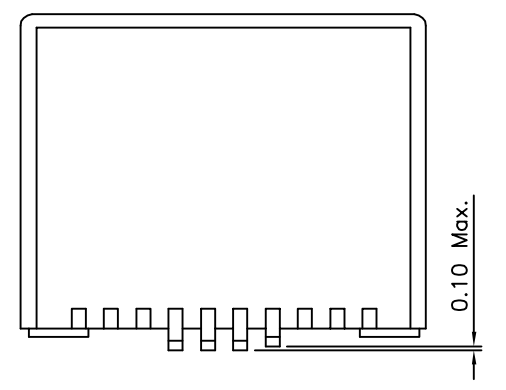

Recommended P.C.B. Layout

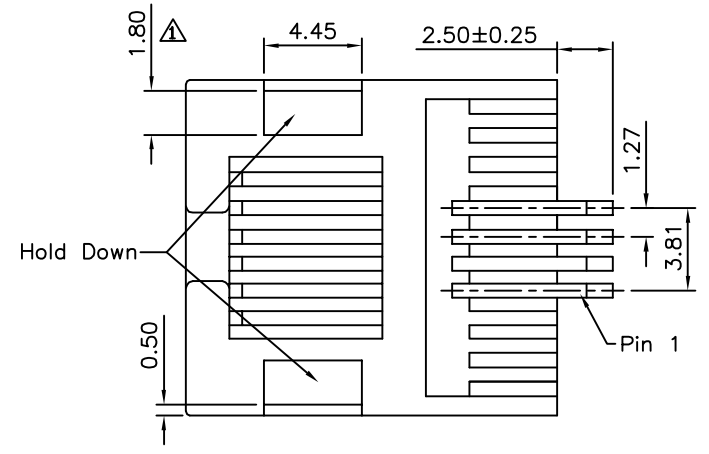

Coplanarity:
 The Maximum Distance Between
 Lowest And Highest Pin When Housing
 Rests On A Flat Surface

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .XX ±0.13 .XXX ±0.05 ANG. ±0.5°
15772		EMILY		
		CHECKED BY HZF		
		DRAWING BY SONG		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	09/14/2012
△ A0		NEW RELEASE	HZF	12/14/2007