



File No. 4320I11806 SHEET 1/1

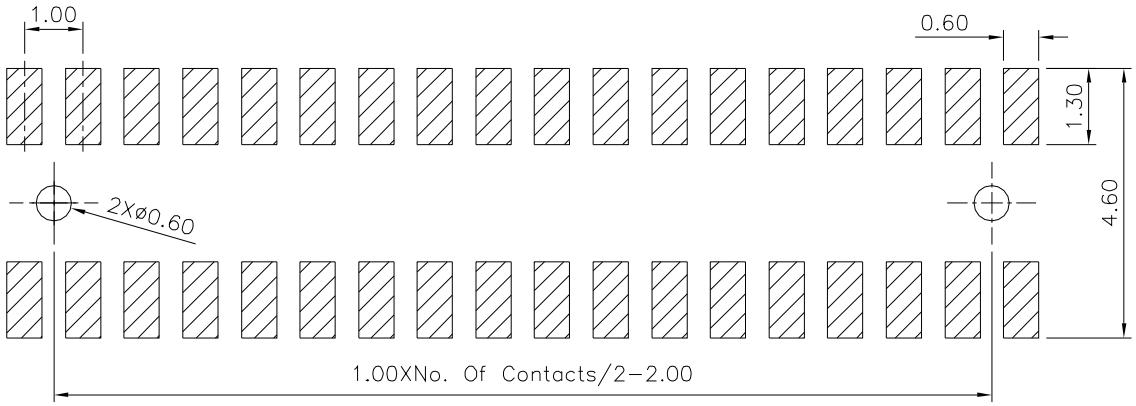

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

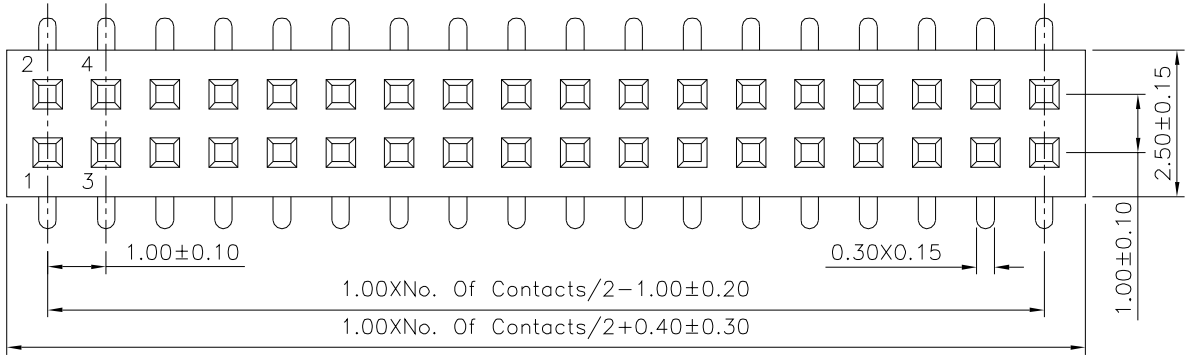

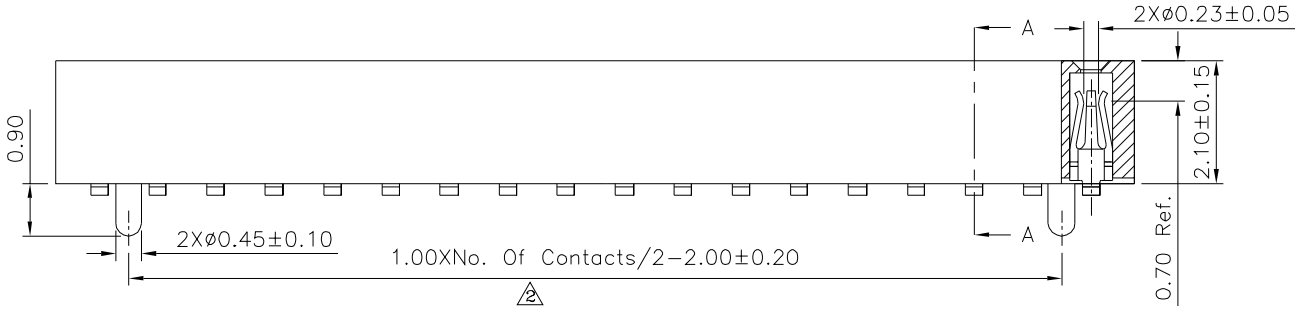



2 Section A−A

SPECIFICATION

Current Rating:1.0A
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V−0),Black
1 Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1	15801
APPROVED BY	EMILY
CHECKED BY	HZF
DRAWING BY	SONG
SCALE	NONE
REV.	B2
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	.X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
2	B2	Modify Data	HZF	09/11/2024
1	B1	Modify Data	HZF	11/22/2012
0	B0	NEW RELEASE	HZF	09/26/2012