

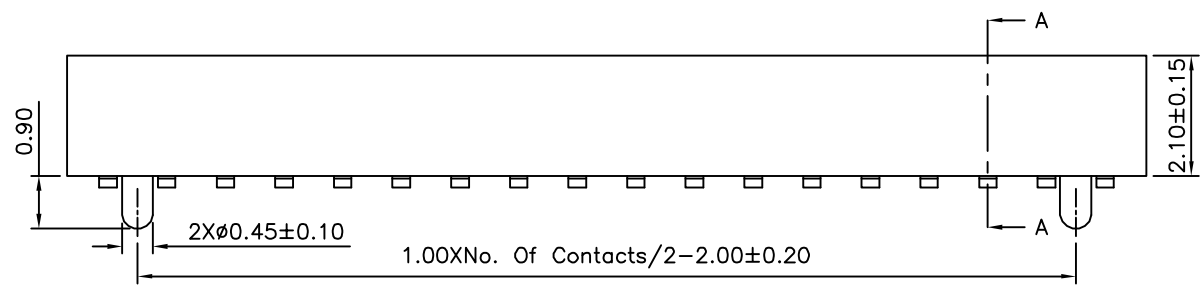
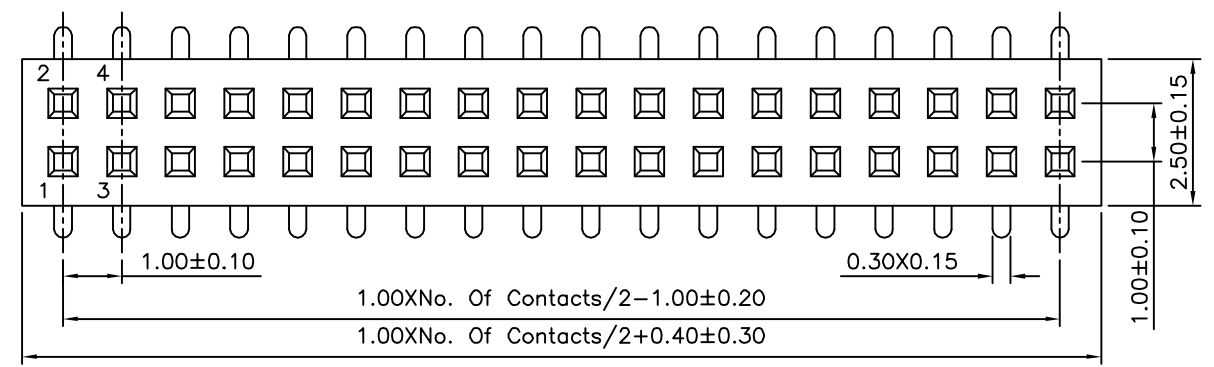


SPECIFICATION

Current Rating:1.0 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 ⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
 RoHS Compliant

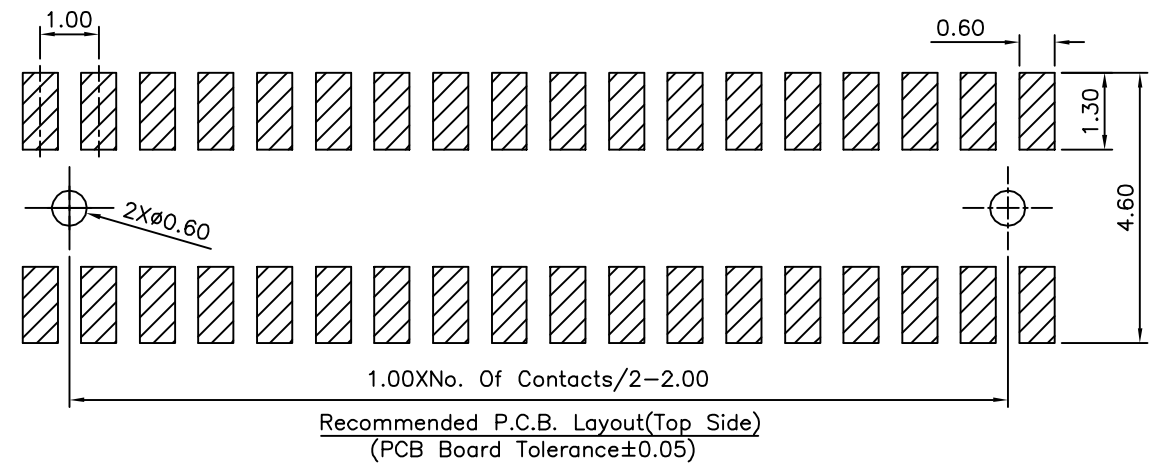

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3° |
| 15801 | | EMILY | | |
| | | CHECKED BY | | |
| | | HZF | | |
| | | DRAWING BY | | UNIT mm |
| | | SONG | | |
| SCALE | NONE | REV. | B1 | NO. REV. |
| | | | | |

| | | | |
|----------|-------------|-----|------------|
| △ B1 | Modify Data | HZF | 11/22/2012 |
| △ B0 | NEW RELEASE | HZF | 09/26/2012 |
| NO. REV. | REVISIONS | CHK | DATE |