

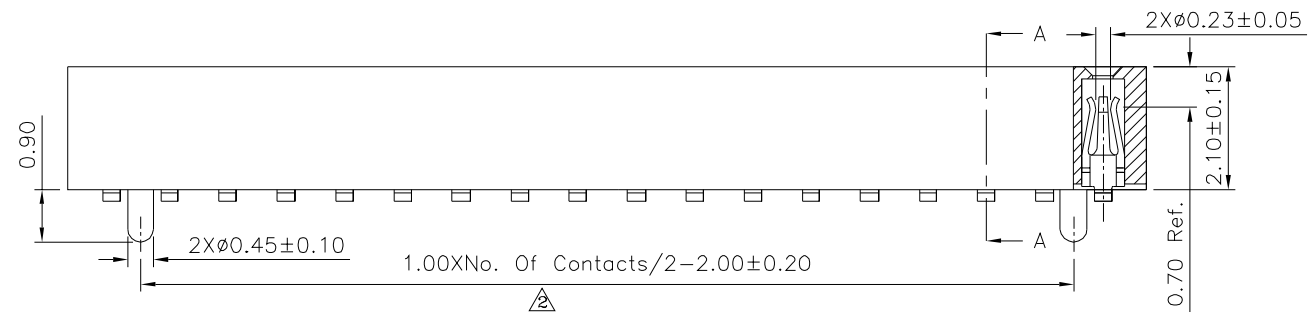
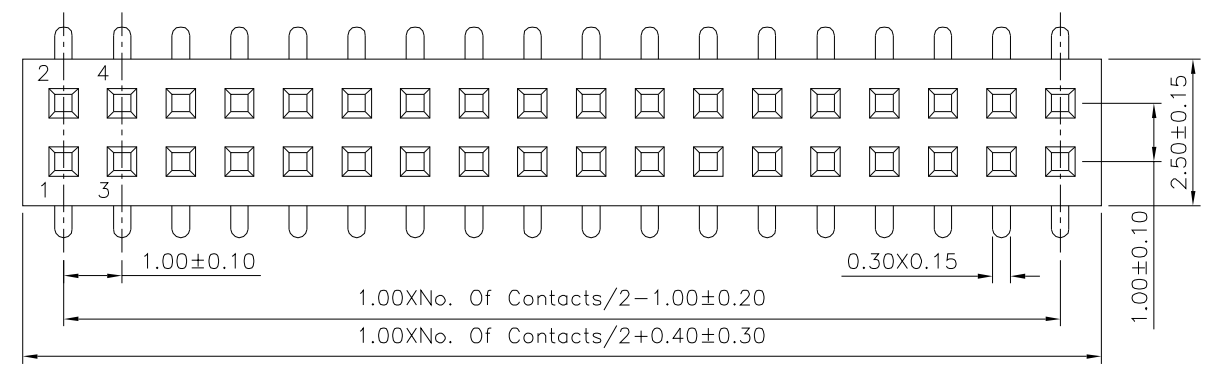


**SPECIFICATION**

Current Rating:1.0A  
 Withstand Voltage:500V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA9T+30%G.F.(UL94V-0),Black  
 ⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel  
 RoHS Compliant

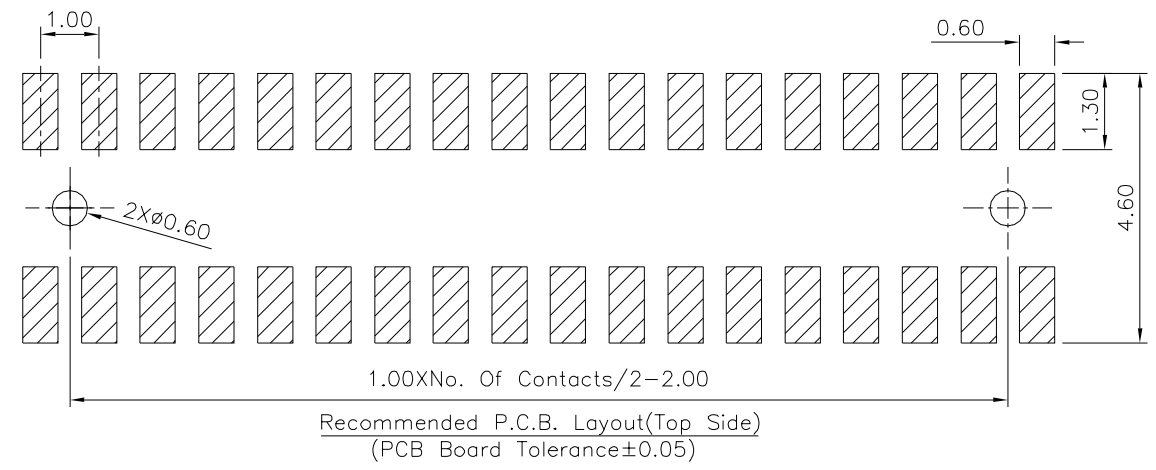

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
15805		EMILY		
		CHECKED BY		
HZF		DRAWING BY		
SONG		B2		UNIT
SCALE	NONE	REV.	B2	mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	B2	Modify Data	HZF	09/11/2024
⚠	B1	Modify Data	HZF	11/22/2012
⚠	B0	NEW RELEASE	HZF	09/26/2012