
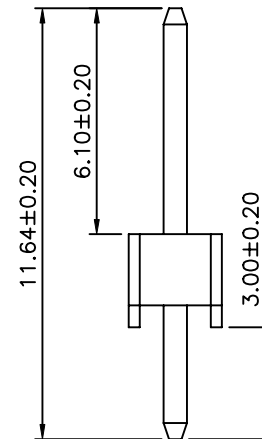
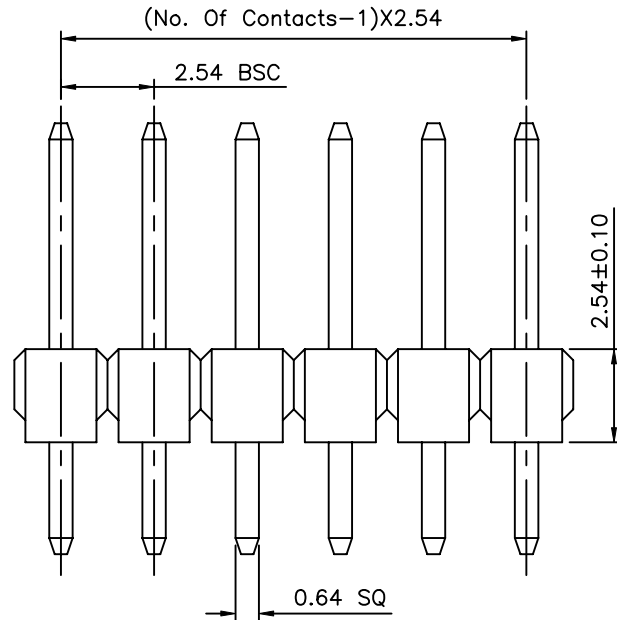
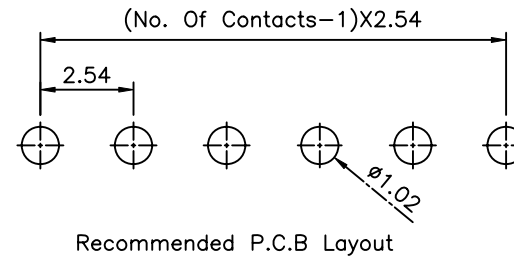


△△ SPECIFICATION
 Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Black
 Contact:Copper Alloys,Gold Plated
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

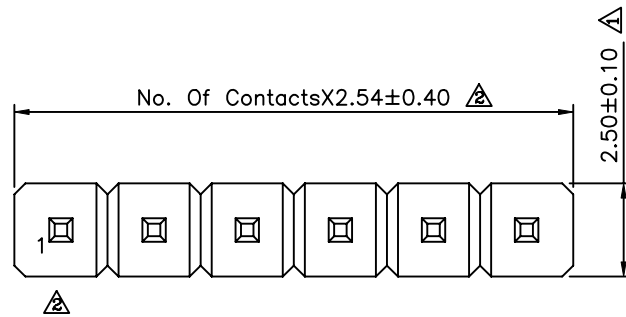

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15948

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG ±5°

SCALE

NONE

REV.

A2

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	02/21/2011
△1	A1	Modify Data	HZF	02/02/2009
△0	A0	NEW RELEASE	SHIN	01/24/2007