File No.	432	SHEET	1 /1

⚠1 SPECIFICATION

Current Rating: 2.0Amp
Insulator Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
Withstand Voltage: 500V AC/DC
Operating Temperature: −40°C~+105°C
Contact: Phosphor Bronze,Au Plated Over Ni
Insulator: PA6T+30%G.F,UL 94V−0
RoHS Compliant

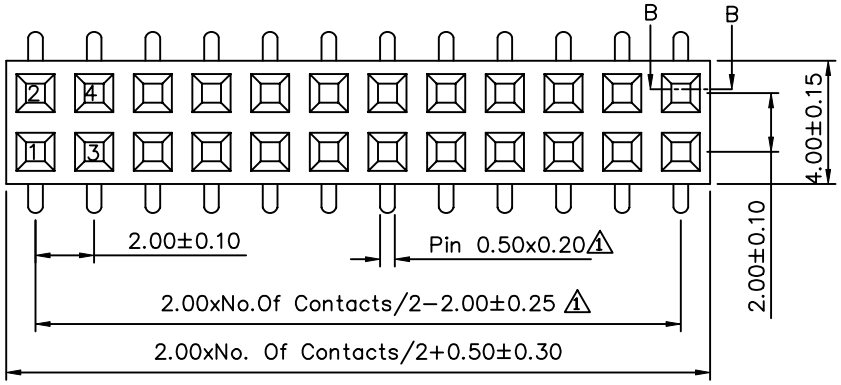

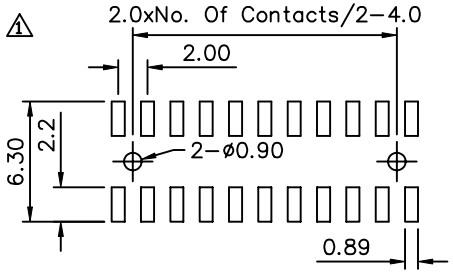

Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

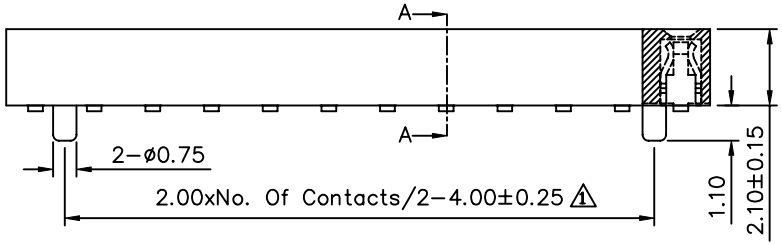

Section B−B

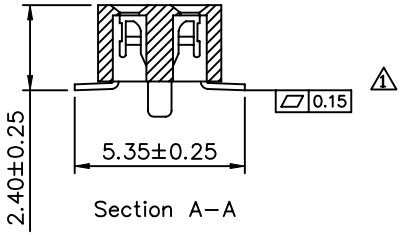

Section A−A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
15973	MEI	⚠1.X ±0.40
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY HYY	.XXX ±0.15
		ANG. ±3°
SCALE NONE	REV. A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	A1	Modify Data	HZF	02/20/2009
⚠0	A0	NEW RELEASE	BECKY	12/01/2004