
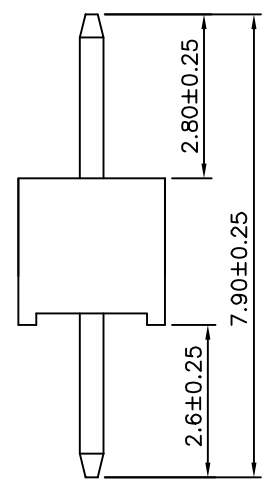


Recommended P.C.B. Layout

△ SPECIFICATION

- Current:1A
- Dielectric Strength:1000V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:5000 Megohms Min.
- Operation Temperature:-55°C~+105°C
- Housing:PA6T(UL94V-0),Black
- △ Contact:Brass,Gold Flash Over Nickel
- No. Of Contacts:2~50 Contacts
- RoHS Compliant

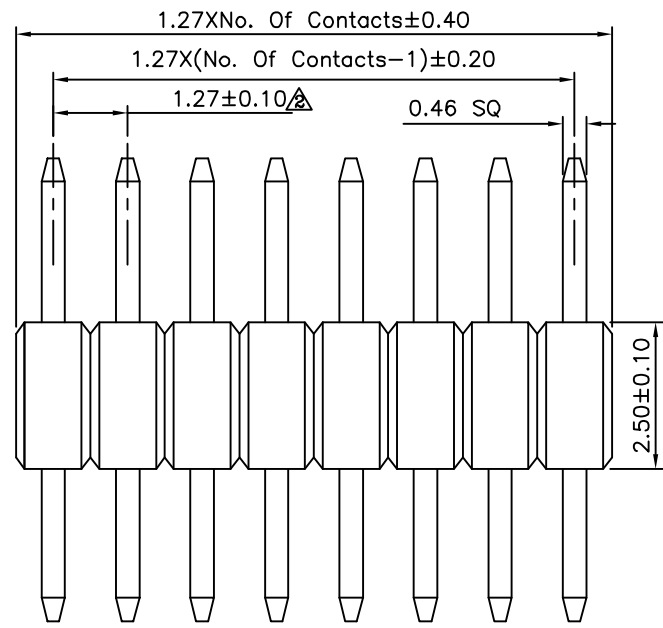

△

△△

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
16159		EMILY		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		GAO		
REV.	B2	NO.		7

NO.	REV.	REVISIONS	CHK	DATE
△	B2	Modify Data	HZF	03/19/2013
△	B1	Modify Data	HZF	12/13/2010
△	B0	NEW RELEASE	HZF	03/19/2009