

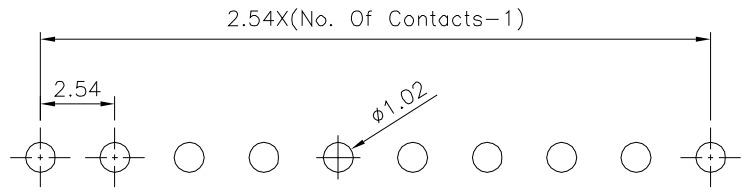
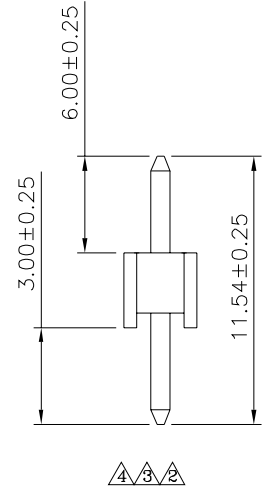


**△△ SPECIFICATION**  
 Current: 3A  
 Operation Temperature: -55°C ~ +105°C  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
**△** Withstanding Voltage: 1000V AC/Mimute  
 Housing: PBT(UL94V-0), Black  
**△** Contact: Brass, Gold Flash Over Nickel  
 No. Of Contacts: 02~40 Contacts  
 RoHS Compliant

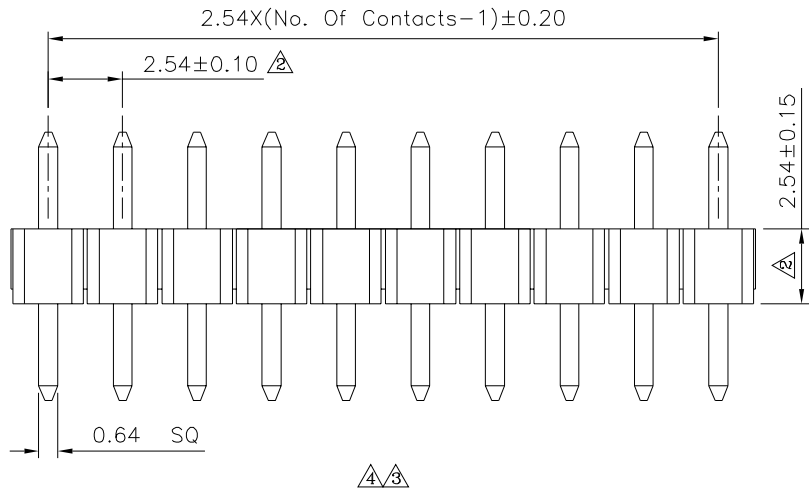

**△** Recommended P.C.B. Layout

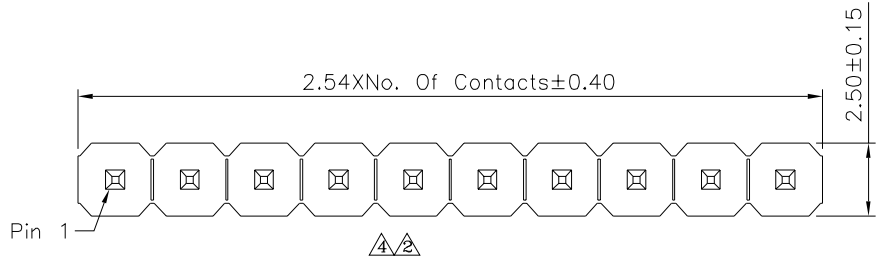

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ± 0.38 .XX ± 0.25 XXX ± 0.05	△ A4	Modify Data	HZF	08/15/2019	
16173		MEI			△ A3	Modify Data	HZF	04/03/2014	
		CHECKED BY			△ A2	Modify Data	HZF	11/01/2010	
SCALE		NONE		DRAWING BY		△ A1	Modify Data	SHIN	04/26/2007
		REV.		A4		△ A0	NEW RELEASE	SHIN	03/06/2006
UNIT		mm		NO. REV.		REVISIONS		CHK	DATE