

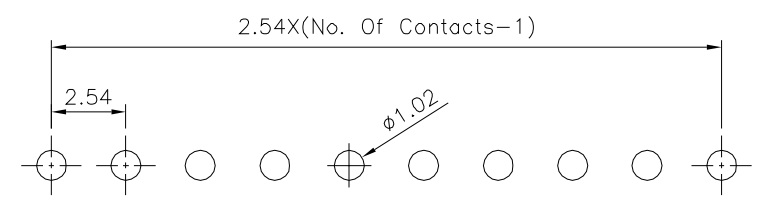
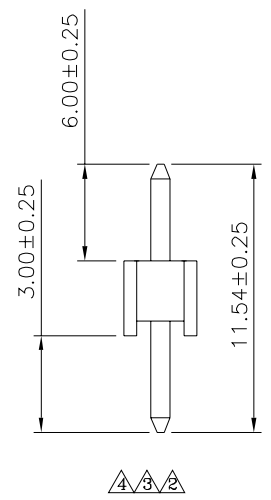


**△△ SPECIFICATION**  
 Current: 3A  
 Operation Temperature: -55°C ~ +105°C  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 △ Withstanding Voltage: 1000V AC/Mimute  
 Housing: PBT(UL94V-0), Black  
 △ Contact: Brass, Gold Flash Over Nickel  
 No. Of Contacts: 02~40 Contacts  
 RoHS Compliant

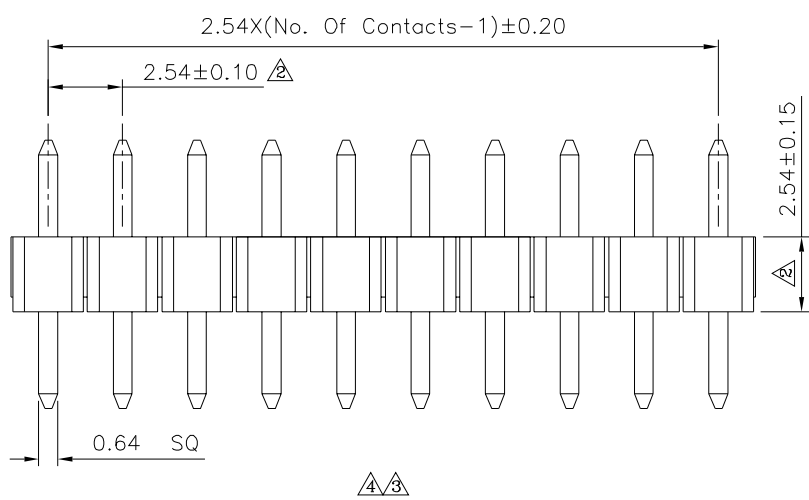

△ Recommended P.C.B. Layout

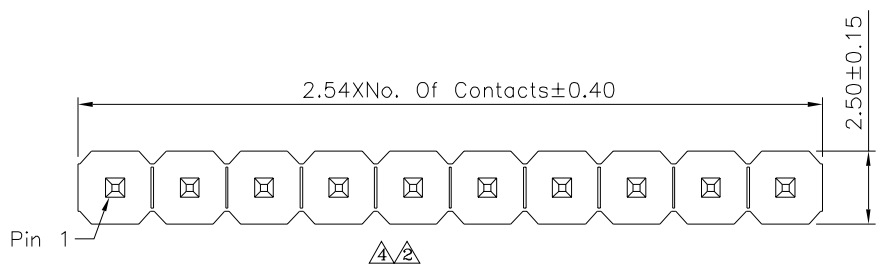

**4UCON**

**元化興業股份有限公司**  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 XXX ±0.05		△ A4	Modify Data	HZF	08/15/2019
16177		MEI				△ A3	Modify Data	HZF	04/03/2014
		CHECKED BY				△ A2	Modify Data	HZF	11/01/2010
SCALE		NONE		DRAWING BY		△ A1	Modify Data	SHIN	04/26/2007
		REV.		A4		△ A0	NEW RELEASE	SHIN	03/06/2006
UNIT		mm		NO. REV.		REVISIONS		CHK	DATE