
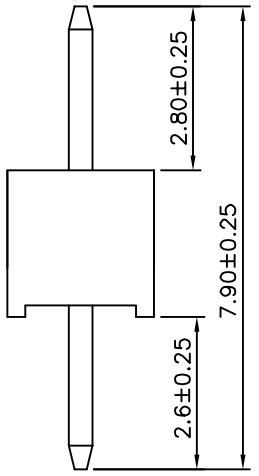


Recommended P.C.B. Layout

△ SPECIFICATION
 Current: 1A
 Dielectric Strength: 1000V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 5000 Megohms Min.
 Operation Temperature: -55°C ~ +105°C
 Housing: PA6T(UL94V-0), Black
 △ Contact: Brass, Gold Flash Over Nickel
 No. Of Contacts: 2~50 Contacts
 RoHS Compliant

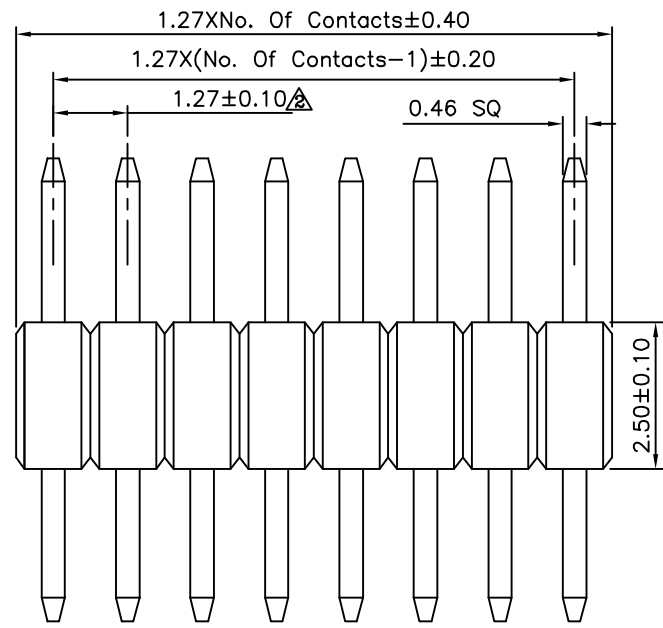

△

△△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|----|----------------|--|--------------------------------------------------------------------------------|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5° |
| 16179 | | EMILY | | |
| | | CHECKED BY HZF | | |
| SCALE | | DRAWING BY | | UNIT mm |
| NONE | | GAO | | |
| REV. | B2 | NO. | | ANG. |

| NO. | REV. | REVISIONS | CHK | DATE |
|-----|------|-------------|-----|------------|
| △2 | B2 | Modify Data | HZF | 03/19/2013 |
| △1 | B1 | Modify Data | HZF | 12/13/2010 |
| △0 | B0 | NEW RELEASE | HZF | 03/19/2009 |