
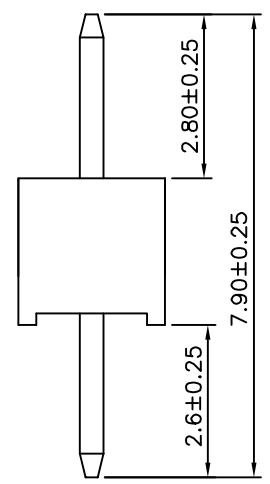


Recommended P.C.B. Layout

**△ SPECIFICATION**  
 Current:1A  
 Dielectric Strength:1000V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megohms Min.  
 Operation Temperature:-55°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 △ Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:2~50 Contacts  
 RoHS Compliant

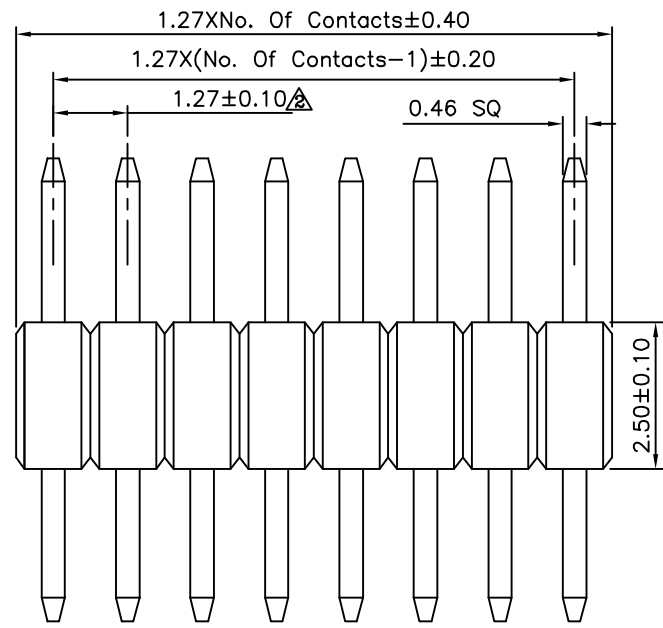

△

△△

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
16180		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		GAO		
SCALE	NONE	REV.	B2	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

NO.	REV.	REVISIONS	CHK	DATE
△	B2	Modify Data	HZF	03/19/2013
△	B1	Modify Data	HZF	12/13/2010
△	B0	NEW RELEASE	HZF	03/19/2009