
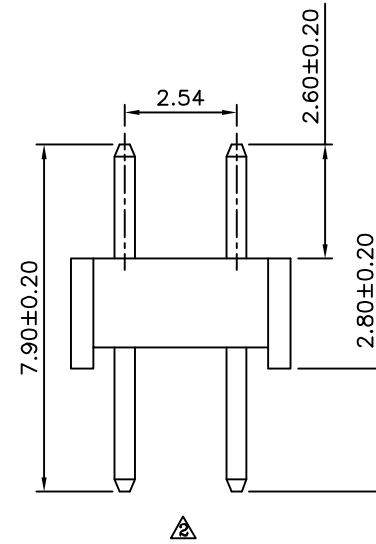
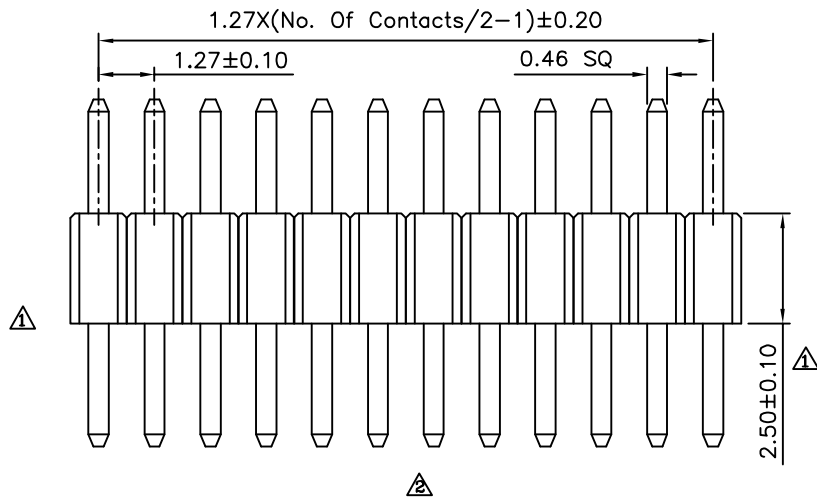


Recommended P.C.B. Layout

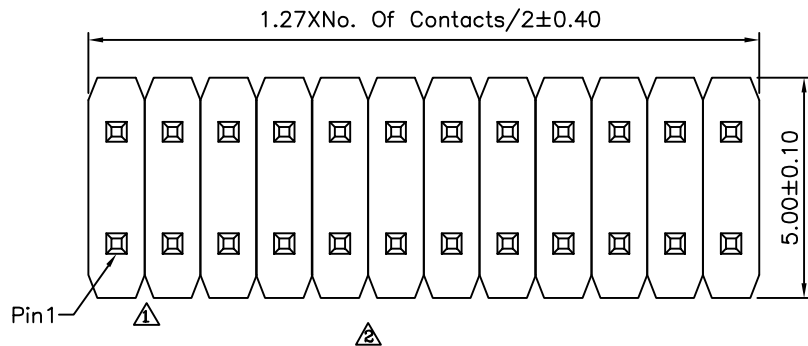

△ SPECIFICATION
 △ Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16211

APPROVED BY
 EMILY

CHECKED BY
 HZF

DRAWING BY
 WSS

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

SCALE NONE

REV. A2

UNIT mm

NO. REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	06/28/2011
△ A1	Modify Data	HZF	09/25/2008
△ A0	NEW RELEASE		