
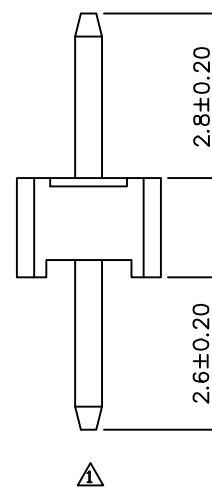
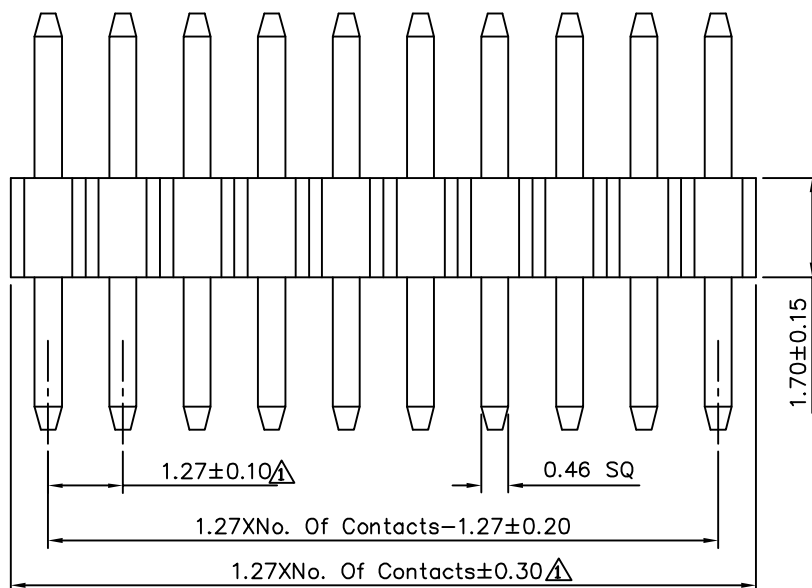


Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance $\pm 0.05$ )

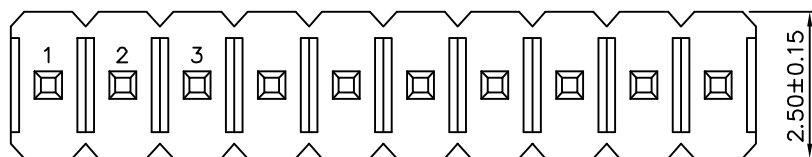

# △ SPECIFICATION

Current Rating:1.0 Amp  
Withstand Voltage:500V AC/DC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:−40°C~+105°C  
Contact:Brass,Gold Plated Over Nickel  
Insulator:PA9T+30%G.F.(UL94V−0),Black  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

16268

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO


REV.

A1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

△.X  $\pm 0.40$   
.XX  $\pm 0.25$   
.XXX  $\pm 0.15$   
ANG.  $\pm 3^\circ$

UNIT  
mm



| NO.  | REV. | REVISIONS   | CHK   | DATE       |
|------|------|-------------|-------|------------|
| △ A1 |      | Modify Data | HZF   | 12/18/2012 |
| △ A0 |      | NEW RELEASE | BECKY | 11/03/2005 |