
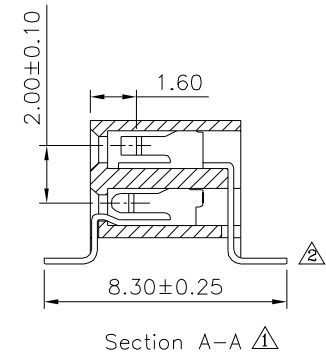
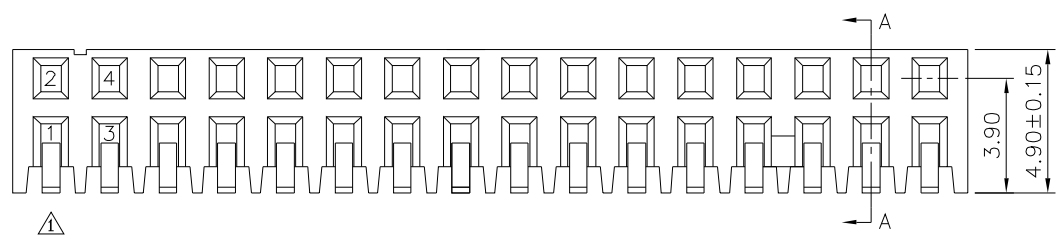


Recommended P.C.B. Layout (Top Side)  $\Delta$   
(PCB Board Tolerance  $\pm 0.05$ )

$\Delta$  SPECIFICATION  
 Current Rating: 2.0 Amp  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Contact: Phosphor Bronze, Gold Plated Over Nickel  
 $\Delta$  Insulator: PA9T+30%G.F.(UL94V-0), Black  
 RoHS Compliant

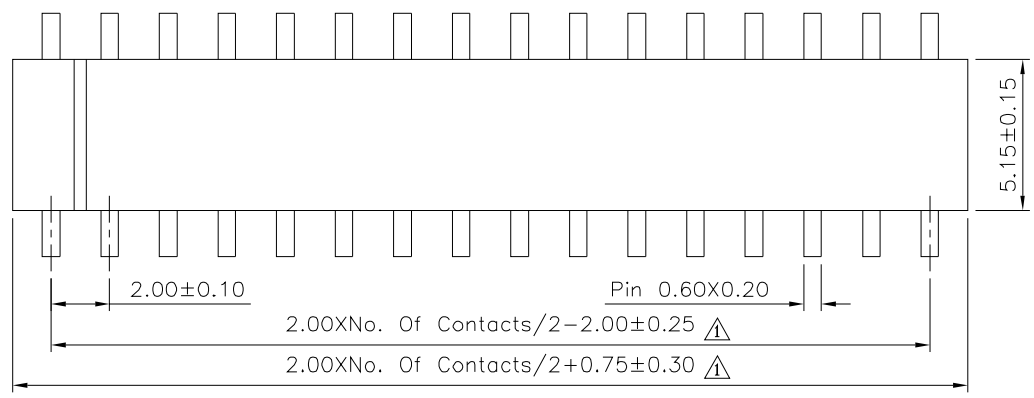

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. $\Delta$		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\Delta$ .X $\pm 0.40$ .XX $\pm 0.25$ .XXX $\pm 0.15$ ANG. $\pm 3^{\circ}$
16419		EMILY		
		CHECKED BY HZF		
DRAWING BY SONG		UNIT mm		
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
$\Delta$ A2		Modify Data	HZF	04/24/2014
$\Delta$ A1		Modify Data	HZF	01/04/2010
$\Delta$ A0		NEW RELEASE	BECKY	11/04/2005