

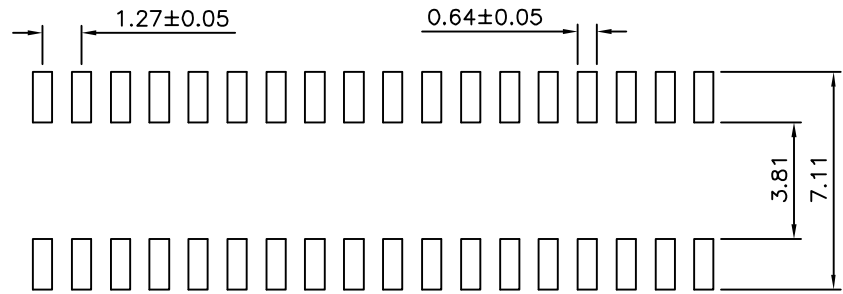



**SPECIFICATION**

Current Rating:1.0A/Contact Max.  
 Withstand Voltage:300V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Housing:PA6T+30%G.F.(UL94V-0),Black  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 RoHS Compliant

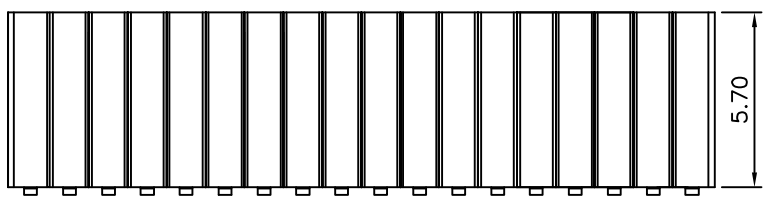

Recommended P.C.B. Layout

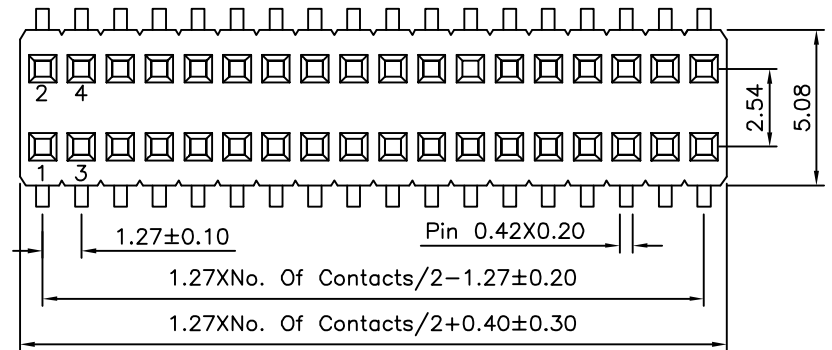

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |             |    |   |
|-------------|------|-------------|----|---|
| DRAWING No. |      | APPROVED BY |    | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>X. ±0.50<br>X ±0.30<br>.XX ±0.20<br>.XXX ±0.10<br>ANG. ±5° |
| 16738       |      | EMILY       |    |   |
|             |      | CHECKED BY  |    |   |
|             |      | HZF         |    |   |
|             |      | DRAWING BY  |    |   |
|             |      | SAN         |    |   |
| SCALE       | NONE | REV.        | A0 | UNIT mm   |

|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| △ A0 |      | NEW RELEASE | HZF | 10/09/2013 |