

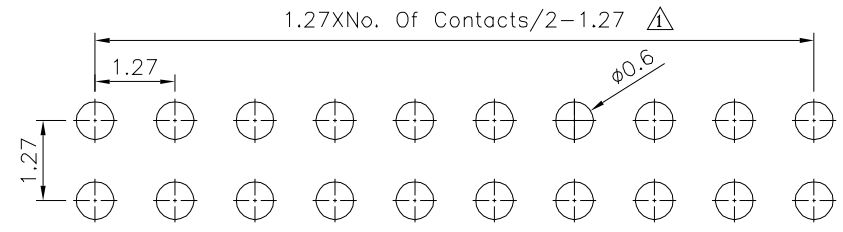
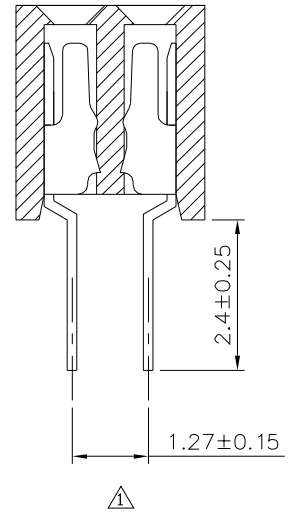


SPECIFICATION
 Current Rating:1 Amps
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

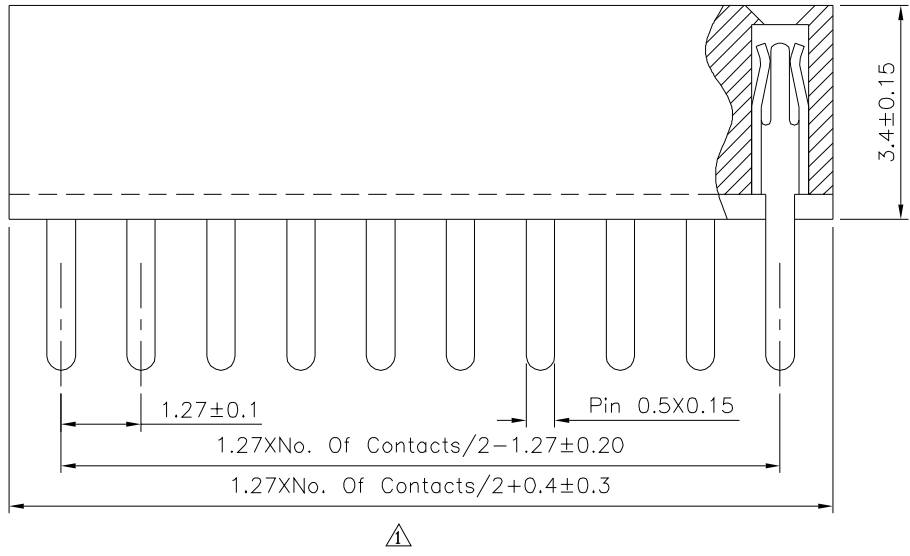

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

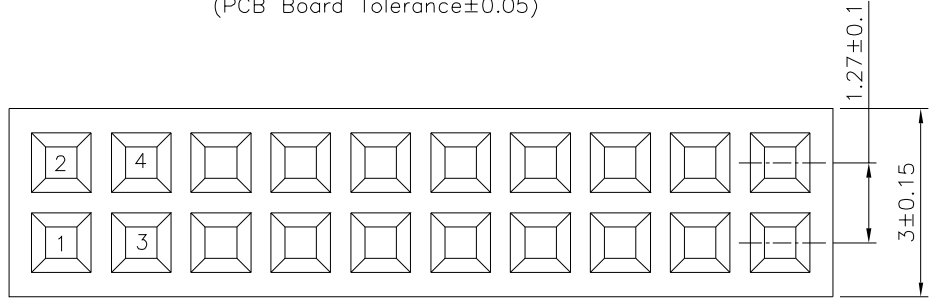

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 16829

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

SCALE NONE

REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.25 X.* ±2*
 .X ±0.20 .X* ±1.5*
 .XX ±0.15 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A1	Modify Data	HZF	05/24/2018
⚠	A0	NEW RELEASE	HZF	08/21/2013