
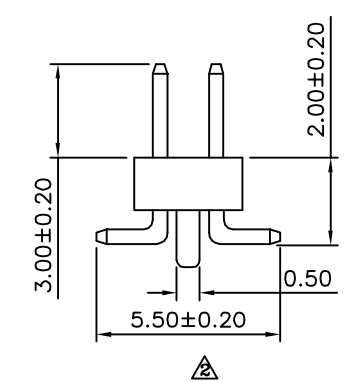
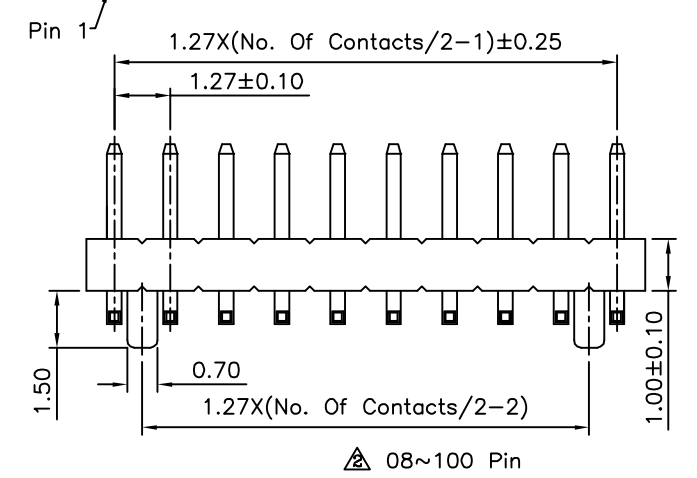
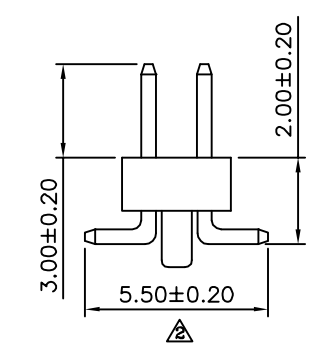



△ SPECIFICATION
 Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

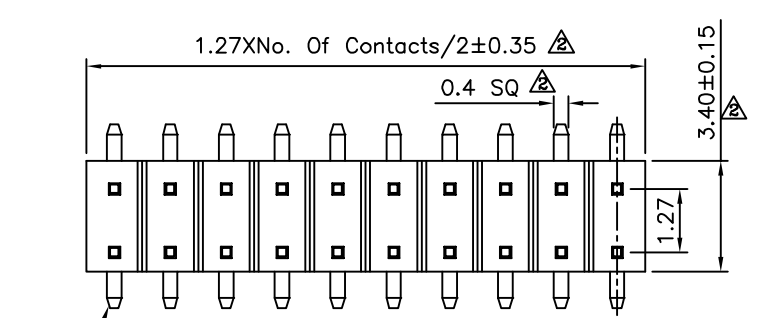

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°					
16903		EMILY			△ A2	Modify Data	HZF	07/29/2011	
		CHECKED BY			HZF		△ A1	Modify Data	HZF
		DRAWING BY		WSS		△ A0	NEW RELEASE	HZF	12/02/2008
SCALE	NONE	REV.	A2	UNIT	mm	NO. REV.	REVISIONS	CHK	DATE