

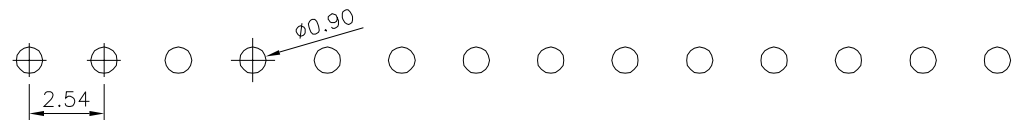

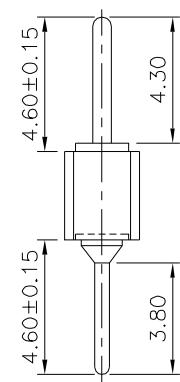


**SPECIFICATION**

Current Rating: 3 Amps/Contact Max.  
 Contact Resistance: 4 Milliohms Max./Contact  
 Insulation Resistance: 1000 Megaohms Min. At 100V  
 Operating Voltage: 60V AC/DC  
 Operating Temperature: -55°C~+105°C  
 Pin: Brass, Gold Flash Over All, Over Nickel  
 Insulator: PPS(UL94V-0), Black  
 RoHS Compliant

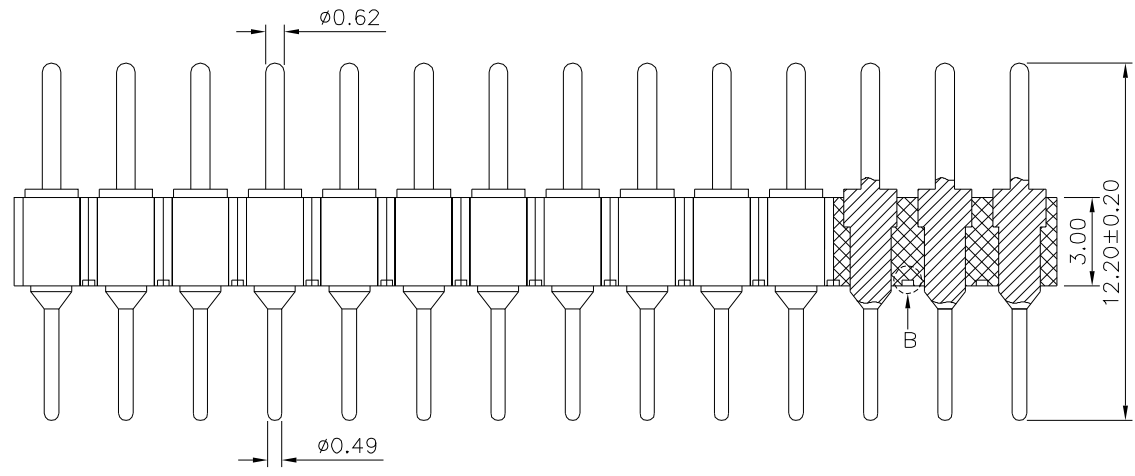

Recommended P.C.B. Layout

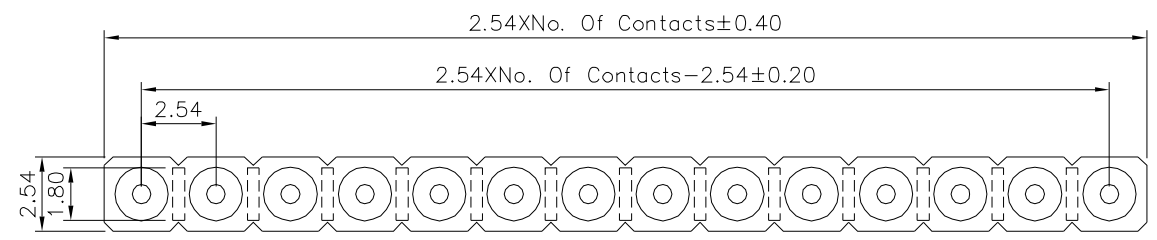

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 16944  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY HAO  
 REV. BO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 XX ±0.30  
 XXX ±0.20  
 .XXX ±0.10  
 ANG. ±5°  
 UNIT mm

|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| △ BO |      | NEW RELEASE | HZF | 01/06/2016 |