

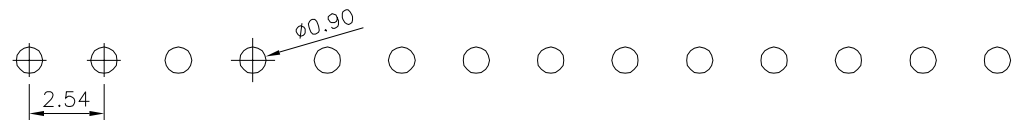

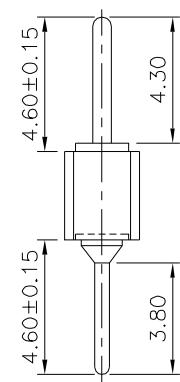


SPECIFICATION

Current Rating: 3 Amps/Contact Max.
 Contact Resistance: 4 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operating Voltage: 60V AC/DC
 Operating Temperature: -55°C~+105°C
 Pin: Brass, Gold Flash Over All, Over Nickel
 Insulator: PPS(UL94V-0), Black
 RoHS Compliant

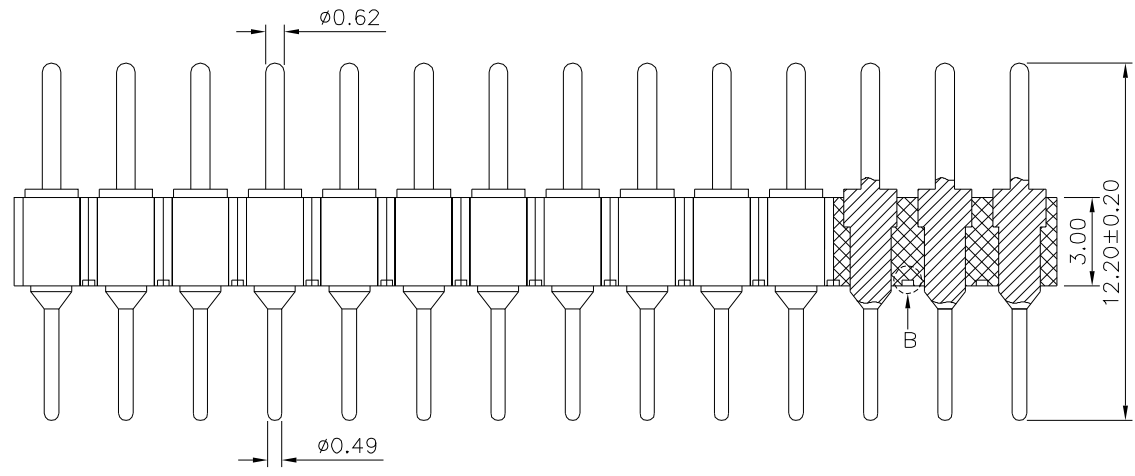

Recommended P.C.B. Layout

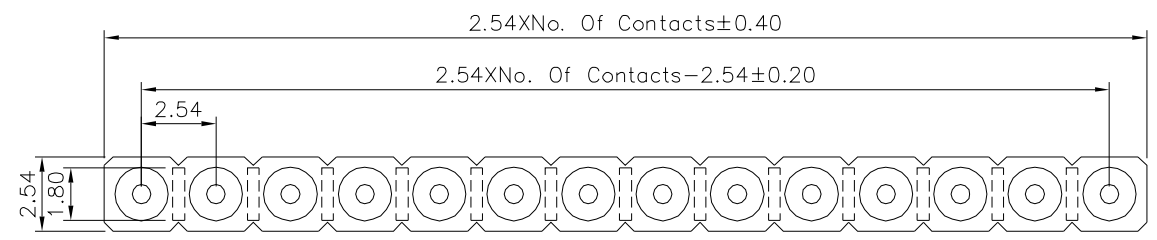

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
16947		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		HAO	
SCALE	NONE	REV.	BO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	BO	NEW RELEASE	HZF	01/06/2016