
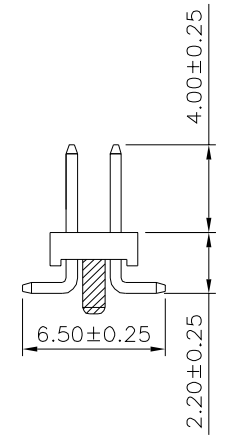
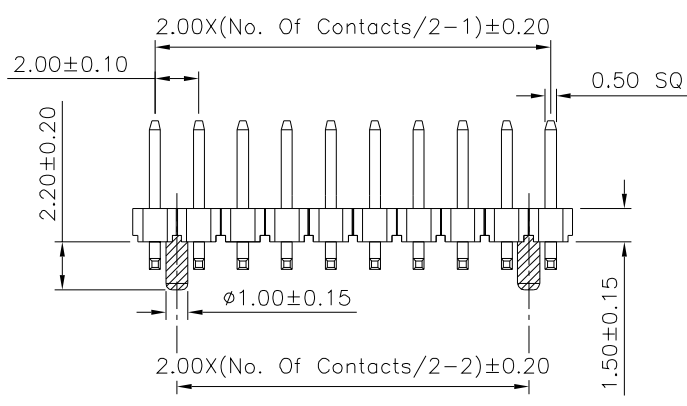


**SPECIFICATION**  
 Current Rating:2A  
 Dielectric Strength:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:06~80 Contacts  
 RoHS Compliant

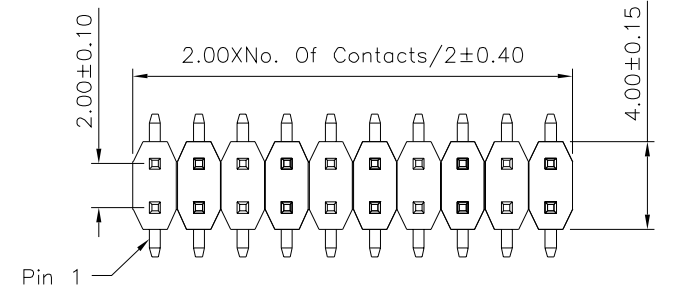

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |  |             |  |  |
|-------------|--|-------------|--|--|
| DRAWING No. |  | APPROVED BY |  | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>.X ±0.38<br>.XX ±0.25<br>.XXX ±0.05 |
| 17137       |  | MEI         |  |  |
|             |  | CHECKED BY  |  |  |
| SCALE       |  | REV.        |  | UNIT   |
|             |  | NONE        |  | B0   |

|     |      |             |     |            |
|-----|------|-------------|-----|------------|
| NO. | REV. | REVISIONS   | CHK | DATE       |
| △   | B0   | NEW RELEASE | HZF | 06/02/2022 |