
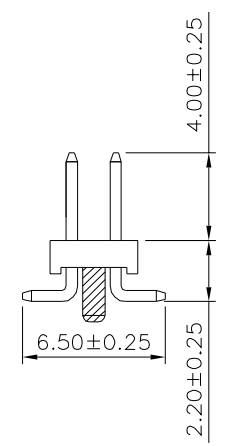
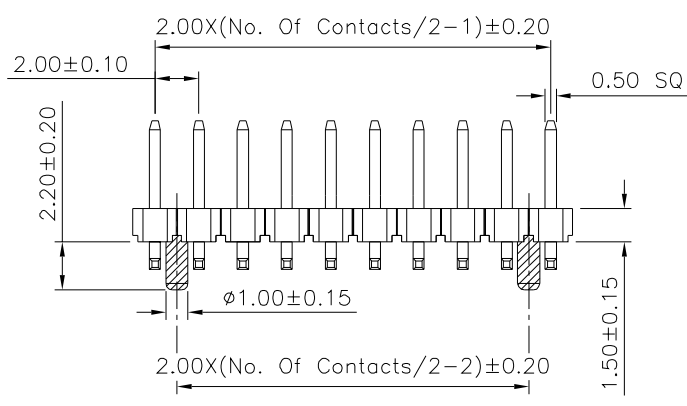


**SPECIFICATION**  
 Current Rating:2A  
 Dielectric Strength:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:06~80 Contacts  
 RoHS Compliant

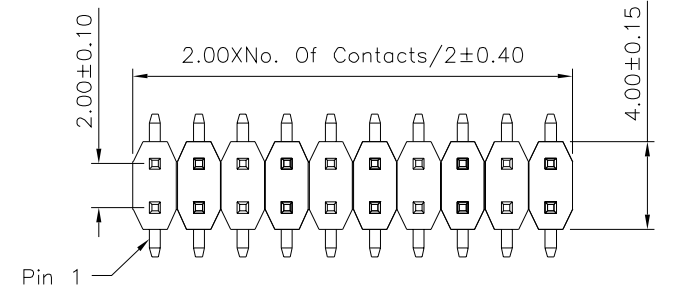

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 17144

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY GAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 .XXX ±0.05

SCALE NONE

REV. B0

UNIT mm

△ B0	NEW RELEASE	HZF	06/02/2022
NO. REV.	REVISIONS	CHK	DATE