

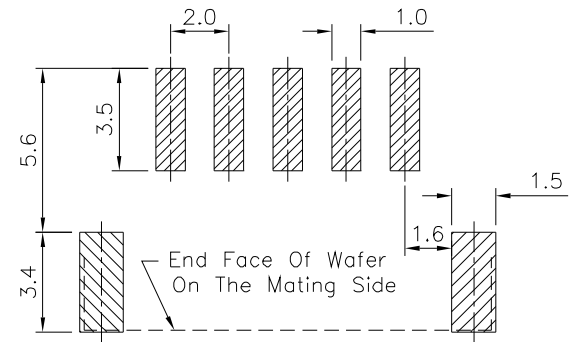
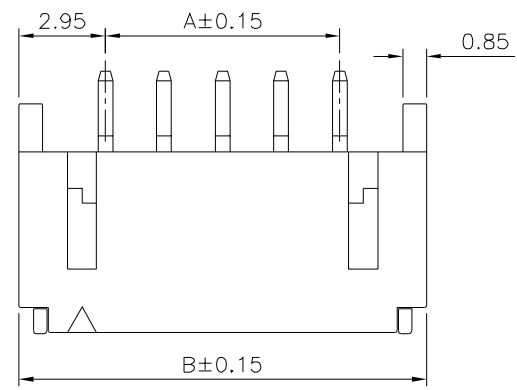
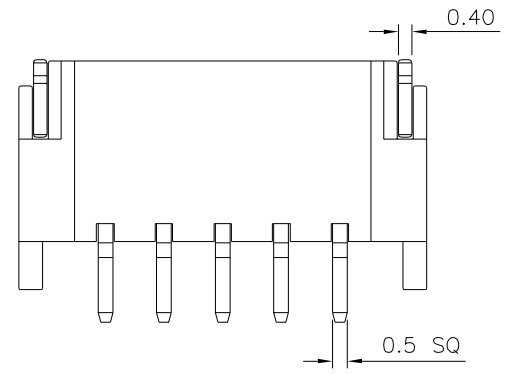


△ SPECIFICATION

Current Rating:2A AC/DC
 Voltage Rating:100V AC/DC
 Withstand Voltage:800V AC/Minute
 Contact Resistance:Initial Value 10 Milliohms Max.
 After Environmental Testing 20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-40°C~+85°C
 Applicable PC Board Thickness:0.8~1.6mm
 Insulator:HTN(UL94V-0)
 Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

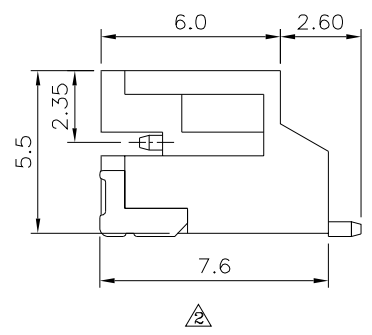

Recommended P.C.Board Layout △

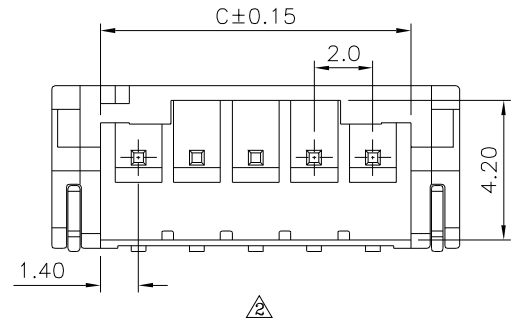

| Pin | A | B | C |
|-----|-------|-------|-------|
| 2 | 2.00 | 8.00 | 4.80 |
| 3 | 4.00 | 10.00 | 6.80 |
| 4 | 6.00 | 12.00 | 8.80 |
| 5 | 8.00 | 14.00 | 10.80 |
| 6 | 10.00 | 16.00 | 12.80 |
| 7 | 12.00 | 18.00 | 14.80 |
| 8 | 14.00 | 20.00 | 16.80 |
| 9 | 16.00 | 22.00 | 18.80 |
| 10 | 18.00 | 24.00 | 20.80 |
| 11 | 20.00 | 26.00 | 22.80 |
| 12 | 22.00 | 28.00 | 24.80 |
| 13 | 24.00 | 30.00 | 26.80 |
| 14 | 26.00 | 32.00 | 28.80 |
| 15 | 28.00 | 34.00 | 30.80 |
| 16 | 30.00 | 36.00 | 32.80 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
 17324

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △△ .X ±0.3
 .XX ±0.2
 ANG.

SCALE NONE REV. A3 UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|-----|------|-------------|-----|------------|
| △ | A3 | Modify Data | HZF | 08/14/2018 |
| △ | A2 | Modify Data | HZF | 10/04/2013 |
| △ | A1 | Modify Data | HZF | 08/09/2012 |
| △ | A0 | NEW RELEASE | HZF | 12/27/2007 |