
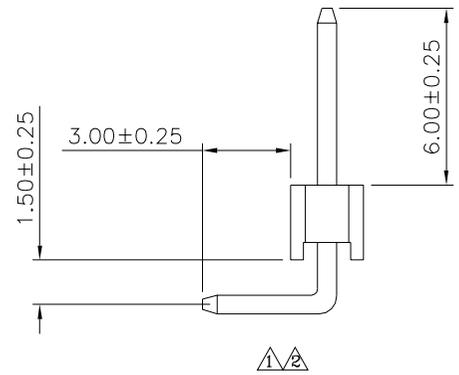
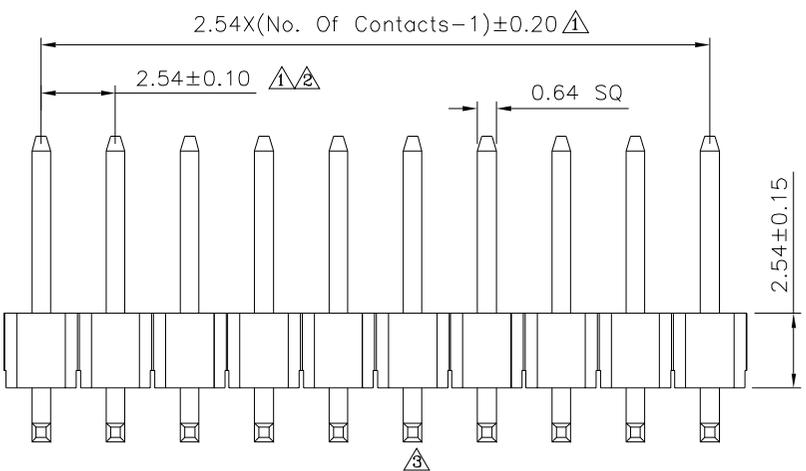


Recommended P.C.B. Layout

- △ SPECIFICATION**
- Current:3A
 - △ Operation Temperature: -40°C ~ +105°C
 - Contact Resistance: 20 Milliohms Max.
 - Insulation Resistance: 1000 Megaohms Min.
 - Withstanding Voltage: 1000V AC RMS
 - Housing: PBT(UL94V-0), Black
 - △ Contact: Brass, Gold Flash Over Nickel
 - △ No. Of Contacts: 2~40 Contacts
 - RoHS Compliant

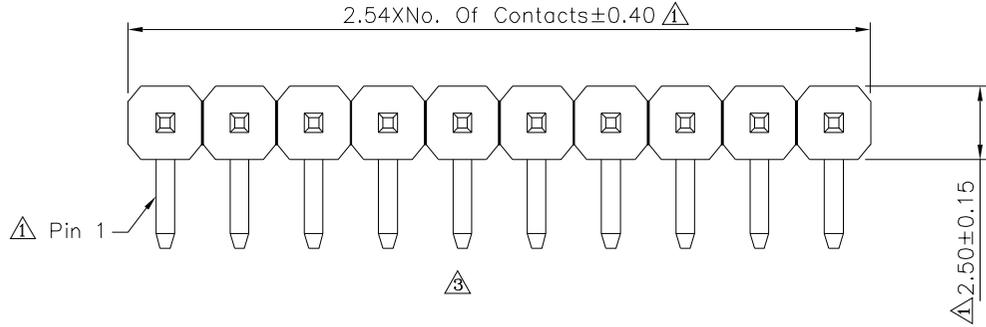

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°					
17382		EMILY			△ A3	Modify Data	HZF	10/28/2025	
		CHECKED BY			△ A2	Modify Data	HZF	03/14/2014	
		DRAWING BY			△ A1	Modify Data	HZF	06/22/2010	
SCALE	NONE	REV.	A3	UNIT	mm	△ A0	NEW RELEASE	SHIN	03/06/2006
						NO. REV.	REVISIONS	CHK	DATE