


6~12P

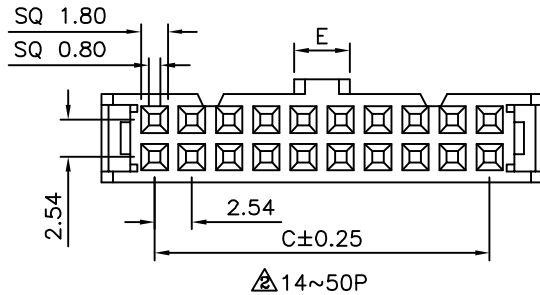

△ SPECIFICATION

Contact Resistance:1 Ohms Max.
 Insulation Resistance:100 Megaohms Min. At DC 500V
 Withstanding Voltage:500V AC For 1 Minute
 Operation Temperature:-40°C~+105°C
 Insulator:PBT+G.F.(UL94V-0),Black
 △ Contact:Brass,Selective Gold Flash Over Nickel
 RoHS Compliant

| Pin | A | B | C | D | E |
|-----|-------|-------|-------|-------|-----|
| 6 | 12.32 | 6.35 | 5.08 | 12.12 | 1.9 |
| 8 | 14.86 | 8.89 | 7.62 | 14.66 | 1.9 |
| 10 | 17.40 | 11.43 | 10.16 | 17.20 | 3.8 |
| 12 | 19.94 | 13.97 | 12.70 | 19.74 | 3.8 |
| 14 | 22.48 | 16.51 | 15.24 | 22.28 | 3.8 |
| 16 | 25.02 | 19.05 | 17.78 | 24.82 | 3.8 |
| 20 | 30.10 | 24.13 | 22.86 | 29.90 | 3.8 |
| 24 | 35.18 | 29.21 | 27.94 | 34.98 | 3.8 |
| 26 | 37.72 | 31.75 | 30.48 | 37.52 | 3.8 |
| 30 | 42.80 | 36.83 | 35.56 | 42.60 | 3.8 |
| 34 | 47.88 | 41.91 | 40.64 | 47.68 | 3.8 |
| 40 | 55.50 | 49.53 | 48.26 | 55.30 | 3.8 |
| 50 | 68.20 | 62.23 | 60.96 | 68.00 | 3.8 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|---|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △△ X. ±0.30 △△.X ±0.20 .XX ±0.10 .XXX ±0.05 |
| 17405 | | MEI | | |
| | | CHECKED BY | | |
| | | HZF | | |
| | | DRAWING BY | | UNIT mm |
| | | CYP | | |
| SCALE | NONE | REV. | B3 | |

| NO. | REV. | REVISIONS | CHK | DATE |
|-----|------|-------------------|-------|------------|
| △ | B3 | Modify Data | HZF | 06/24/2015 |
| △ | B2 | Modify Data | HZF | 09/24/2010 |
| △ | B1 | Del Pin#60,Pin#64 | HZF | 11/28/2007 |
| △ | B0 | NEW RELEASE | BECKY | 04/04/2006 |