

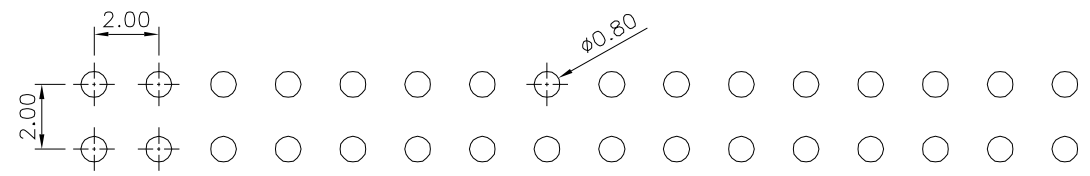


△ SPECIFICATION


Current Rating:1.5 Amp/Contact  
 Withstand Voltage:450V AC/Minute  
 Contact Resistance:20 Milliohms Max./Contact  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

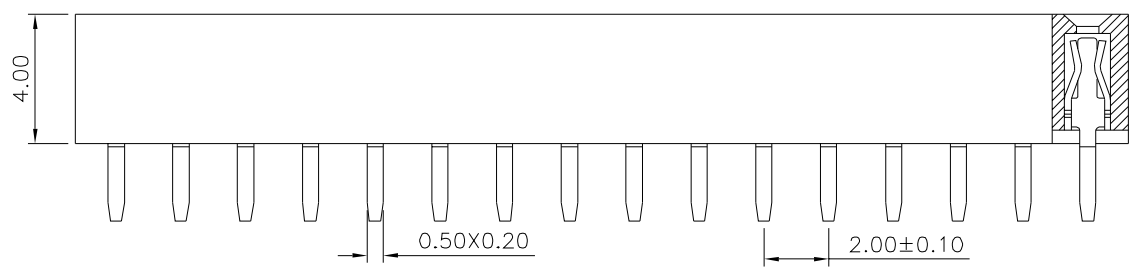

Recommended P.C.B. Layout

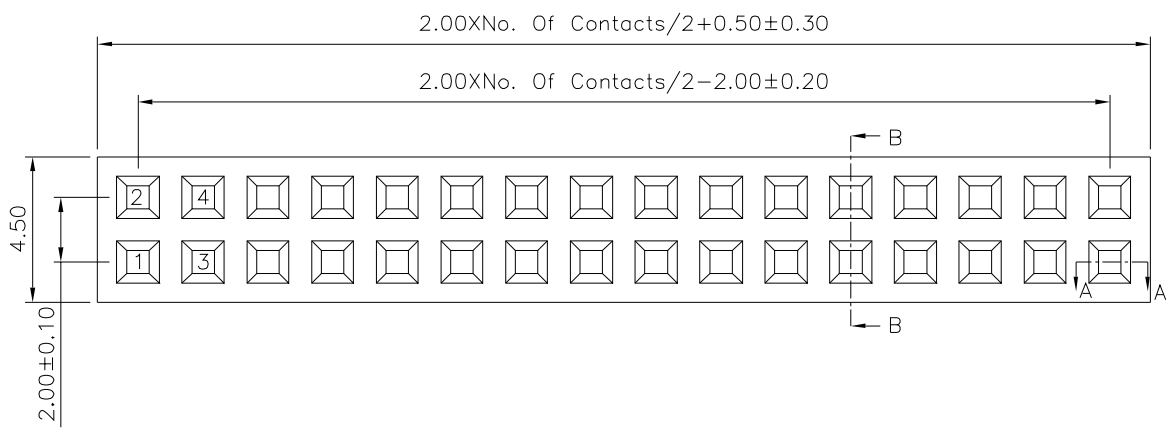

Section A-A



Section B-B

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°															
17462		MEI																	
		HZF																	
		DRAWING BY		<table border="1"> <tr> <td>NO.</td> <td>REV.</td> <td>REVISIONS</td> <td>CHK</td> <td>DATE</td> </tr> <tr> <td>△ A1</td> <td></td> <td>Modify Data</td> <td>HZF</td> <td>10/16/2013</td> </tr> <tr> <td>△ A0</td> <td></td> <td>NEW RELEASE</td> <td>HZF</td> <td>11/30/2011</td> </tr> </table>	NO.	REV.	REVISIONS	CHK	DATE	△ A1		Modify Data	HZF	10/16/2013	△ A0		NEW RELEASE	HZF	11/30/2011
NO.	REV.	REVISIONS	CHK		DATE														
△ A1		Modify Data	HZF	10/16/2013															
△ A0		NEW RELEASE	HZF	11/30/2011															
SCALE	NONE	REV.	A1	UNIT mm															

