
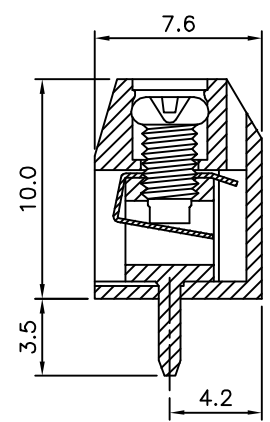
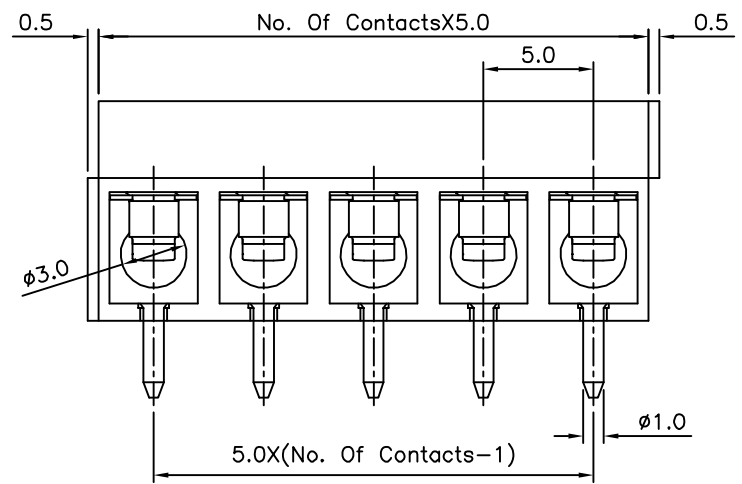


Recommended P.C.B. Layout

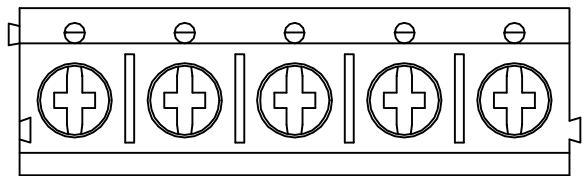

**SPECIFICATION**

Voltage Rating:250V AC  
 Current Rating:15 Amps/Way Max.  
 Contact Resistance:20 Milliohms Max.  
 Withstanding Voltage:2500V AC(1 Minute),Test Time=60s/1 PCS  
 Operation Temperature:-40°C~+105°C  
 Soldering Reliability:Test Temperature:250°C±10°C 5s Max.  
 Torque:4.0 Kgf.cm/M2.5  
 Wire Range:14~24 AWG  
 Terminal:Copper Alloy,Tin Plated  
 Screw:Steel,Galvanized With Cr3+ Plated  
 Wire Guard:Stainless Steel  
 Insulator Body(Housing):Polyamide(UL94V-0),Blue  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
17592		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HAO		
SCALE	NONE	REV.	BO	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	BO	NEW RELEASE	HZF	11/05/2015