

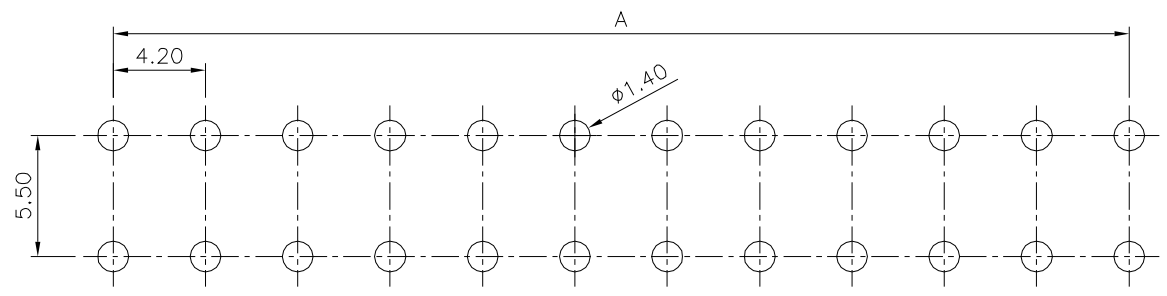


**SPECIFICATION**  
 Current Rating:7A AC/DC  
 Voltage Rating:600V AC/DC  
 Withstanding Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Temperature Range:-25°C~+85°C  
 Insulator:PA66,UL94V-2,Nature Color  
 Contact:Brass,Tin Plated Over Nickel  
 RoHS Compliant

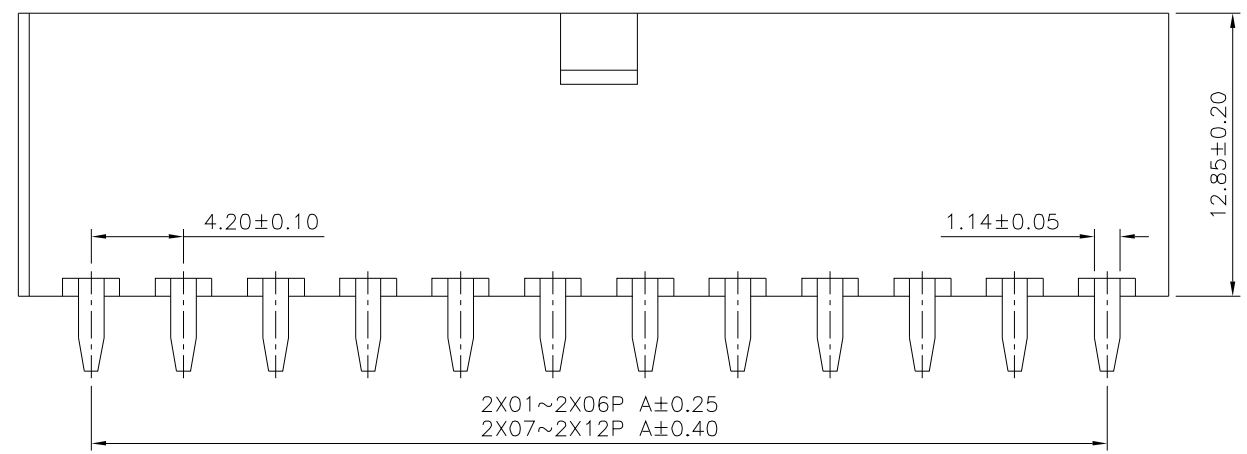


Recommended P.C.B. Layout

2X01~2X06P B±0.30  
 2X07~2X12P B±0.50

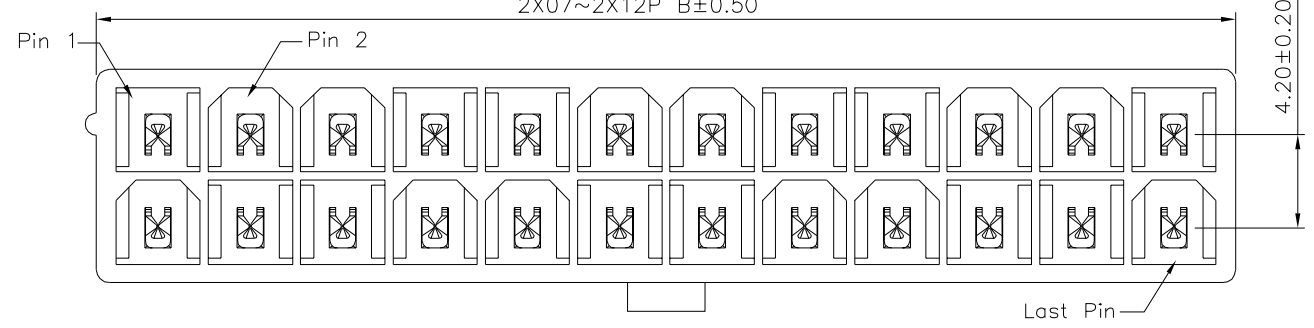

2X01~2X06P A±0.25  
 2X07~2X12P A±0.40

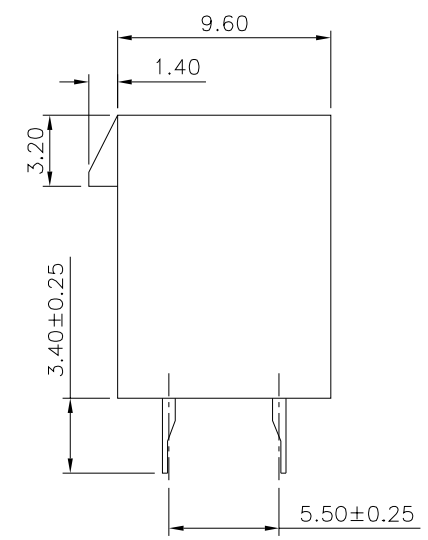


Pin	A	B
02		5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80


**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°
17755		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	BO	UNIT
				mm


△ BO	NEW RELEASE	HZF	06/01/2020
NO. REV.	REVISIONS	CHK	DATE

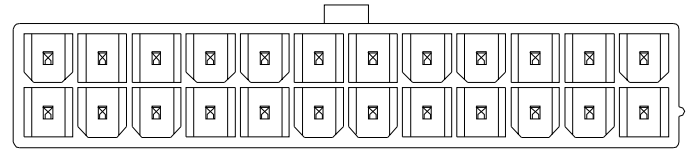


2X12P

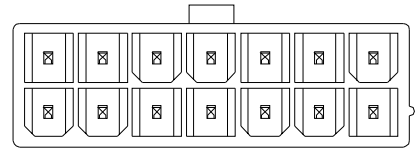


2X7P




2X3P

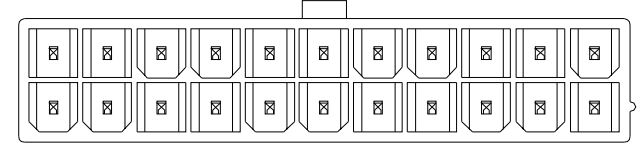


2X11P

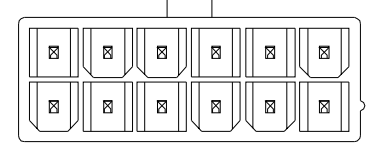


2X6P




2X2P

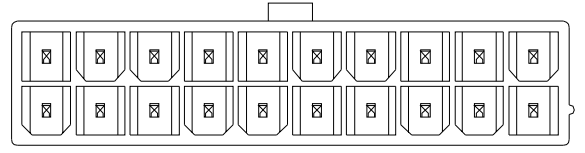


2X10P




2X5P




2X01P

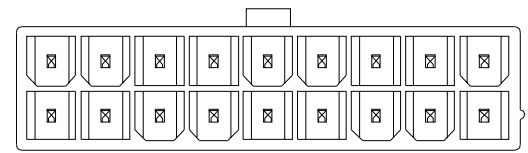

2X9P



2X4P

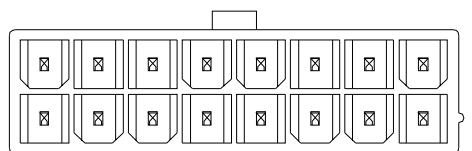

2X8P

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

17755

APPROVED BY  
EMILY

CHECKED BY  
HZF

DRAWING BY  
CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.30  
.X ±0.25  
.XX ±0.20  
.XXX ±0.05  
ANG. ±1°

SCALE

NONE

REV.

BO

UNIT  
mm



NO. REV.

BO NEW RELEASE  
REVISIONS

CHK  
DATE

HZF 06/01/2020