

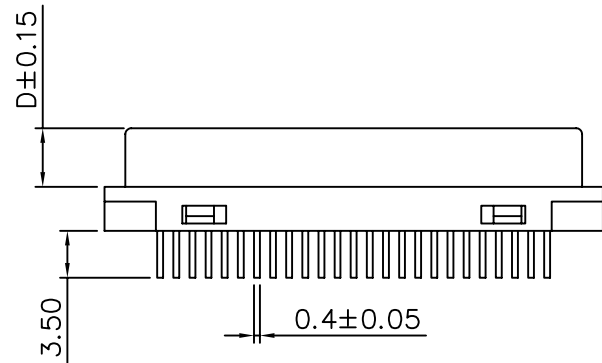


SPECIFICATION

Current Rating:1A
 Insulation Resistance:500 Megohms/Min.
 Withstanding Voltage:500V AC/RMS For 1 Minute
 Contact Resistance: 35 Milliohms Max.
 Temperature Range:-55°C To +105°C
 Housing:Plastic Thermoplasitic
 P.B.T UL 94V-0
 Contact:Phosphor Bronze Gold Selective Plated
 Front Shell:Steel,Nickel Plated Over Copper

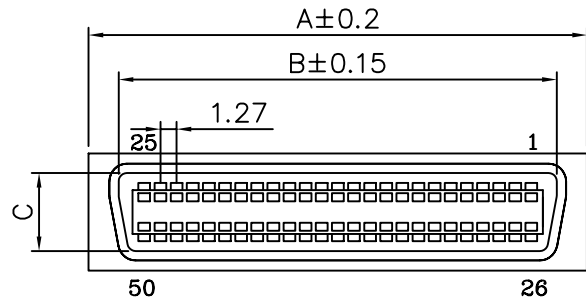

Circuits	A	B	C	D	E	F
14	16.45	12.80	6.46	4.60	8.50	12.35
20	20.00	16.60	6.46	4.60	9.30	11.90
26	24.00	20.40	6.46	4.60	9.30	11.90
36	30.40	26.70	6.46	4.60	8.50	11.90
50	39.30	35.60	6.46	4.60	9.30	11.90
68	50.60	46.95	6.46	4.60	9.30	11.90

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 17814

APPROVED BY MEI
 CHECKED BY LCH
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ± 0.38
 .XX ± 0.25
 AWG.

SCALE NONE REV. UNIT mm NO. REV. REVISIONS CHK DATE