
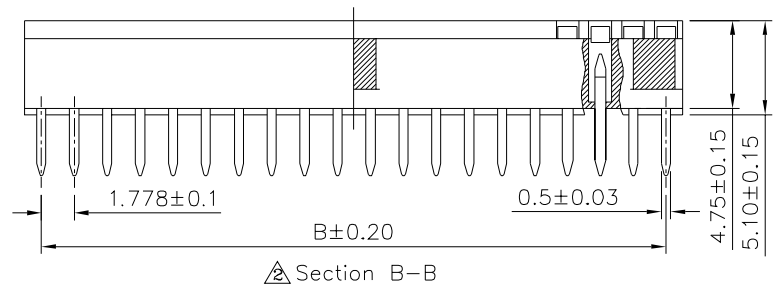
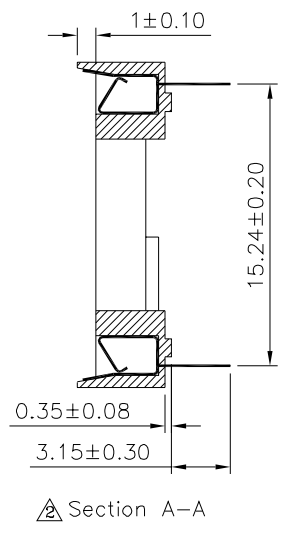


△ SPECIFICATION

Current Rating:1A
 Dielectric Withstanding Voltage:1000V RMS/Minute
 Insulator Resistance:5000 Megaohms Min.
 Operating Temperature:-55°C To 85°C
 Contact Resistance:20 Milliohms initial.
 30 Milliohms After Test.
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 Insulator:PBT(UL94V-0)
 RoHS Compliant

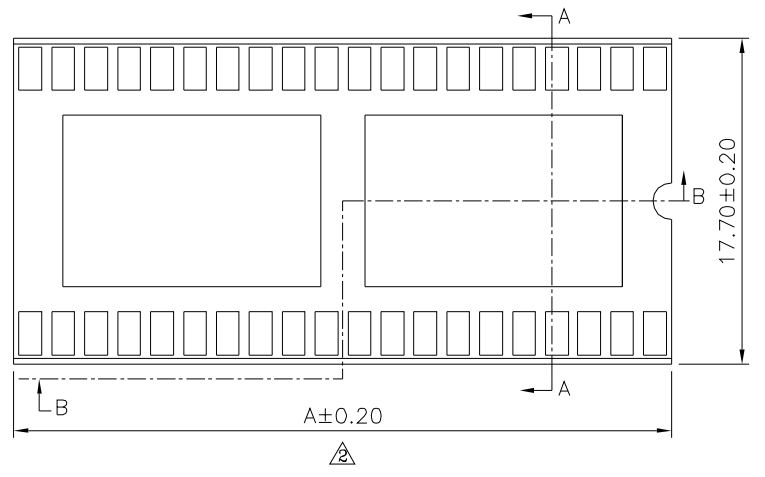

Pin	A	B
40	35.56	33.78
42	37.34	35.56
48	42.67	40.89
52	46.23	44.45
54	48.01	46.23
56	49.78	48.01
58	51.56	49.78
60	53.34	51.56
62	55.12	53.34
64	56.90	55.12

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
17884		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	CYP	
REV.	A2	UNIT	mm	△ A2 Modify Data HZF 02/07/2017
				△ A1 Modify Data SHIN 08/31/2006
				△ A0 NEW RELEASE BECKY 07/19/2004
				NO.REV. REVISIONS CHK DATE