



△ SPECIFICATION


Current Rating:1 Amp
 Dielectric Withstanding Voltage:AC 1000V For 1 Minute
 Insulation Resistance:1000 Megaohms Min. At DC 500V
 Contact Resistance:30 Milliohms Max. At DC 100mA
 Operation Temperature:-55°C~+125°C
 Housing:LCP(UL94V-0)
 Contact:Phosphor Bronze
 Gold Plated 10u" On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

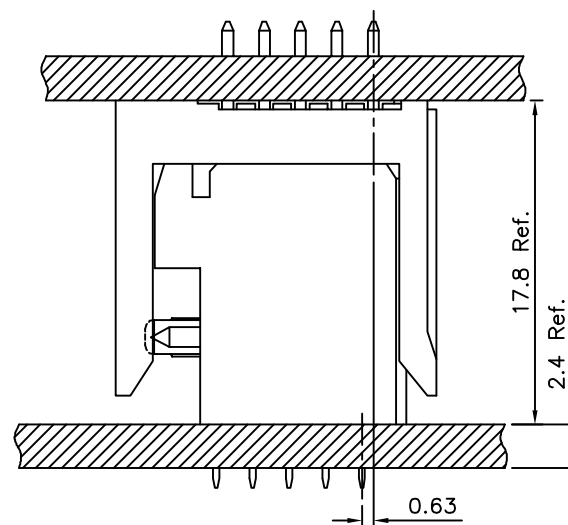


△ Board To Board Offset Application Example

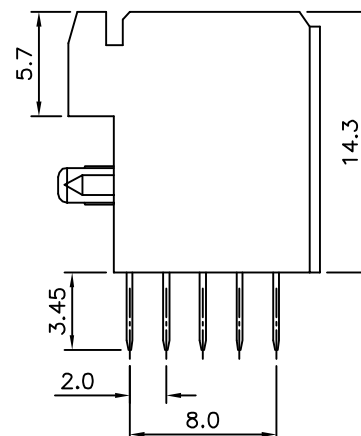


△

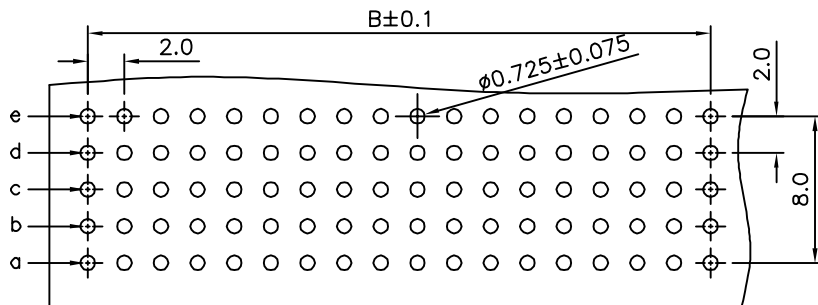

△ Recommended P.C.B. Layout

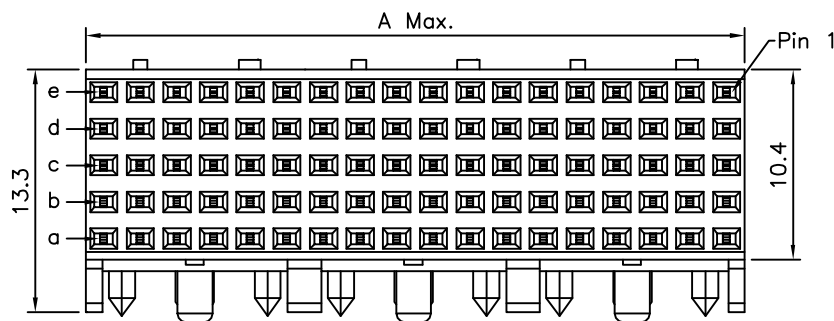

△

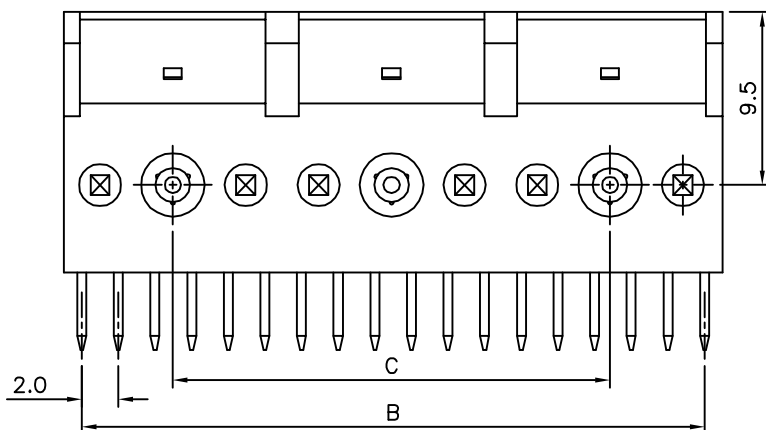

△

Pin	A	B	C
30	11.95	10.0	0
60	23.95	22.0	12.0
90	35.95	34.0	24.0
120	47.95	46.0	36.0
150	59.95	58.0	48.0
180	71.95	70.0	60.0
210	83.95	82.0	72.0
240	95.95	94.0	84.0

DRAWING No.

18245

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ X. ±0.50
 .X ±0.25
 .XX ±0.15

UNIT mm



SCALE

NONE

REV.

A1

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.