

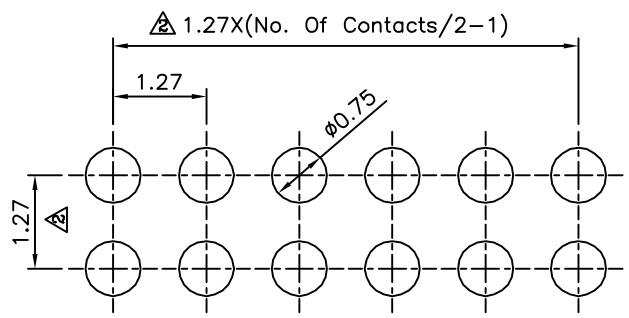
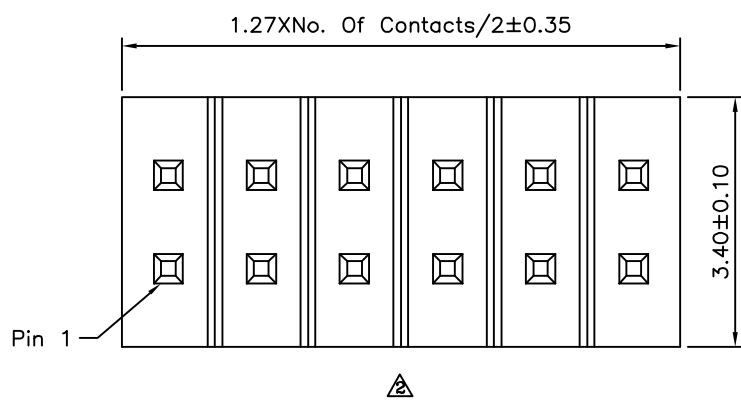


△ SPECIFICATION
 Current Rating:1A
 Operation Temperature:-55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Withstand Strength:1000V AC Minute
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:04~100 Pin
 RoHS Compliant

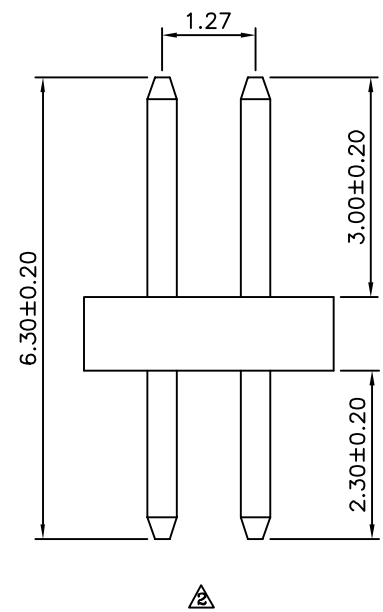

Recommended P.C.B. Layout

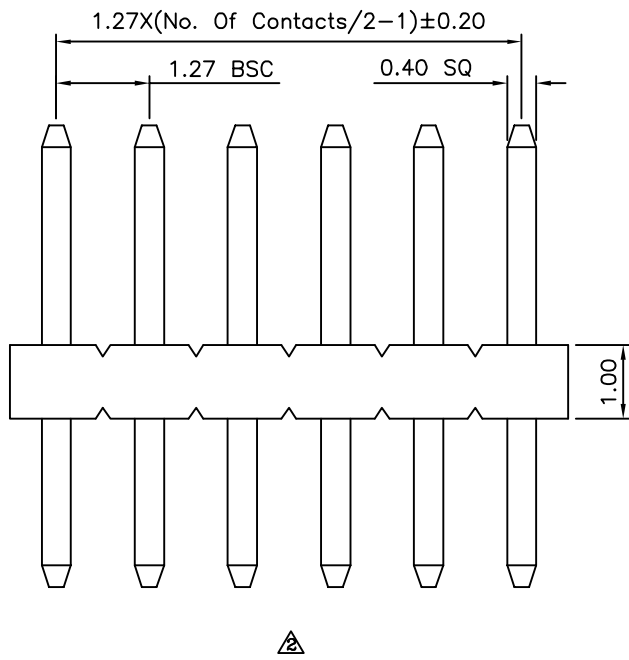

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
18271		MEI	.X ±0.38	
		HZF	.XX ±0.25	
SCALE		DRAWING BY	ANG. ±5°	UNIT
NONE	REV.	QQJ		mm
	A2			

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/19/2010
△ A1		Modify Data	BECKY	04/04/2006
△ A0		NEW RELEASE	BECKY	01/14/2005