

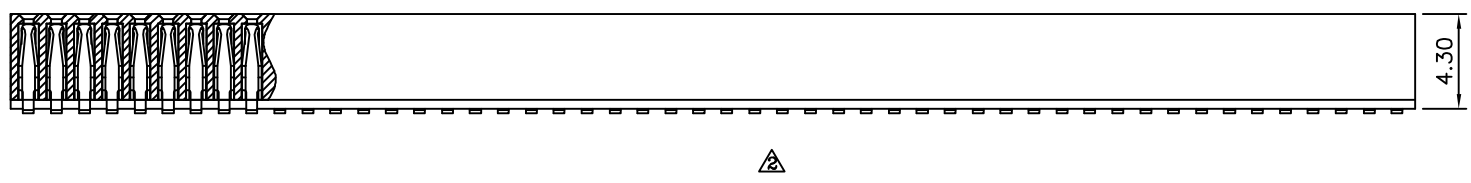
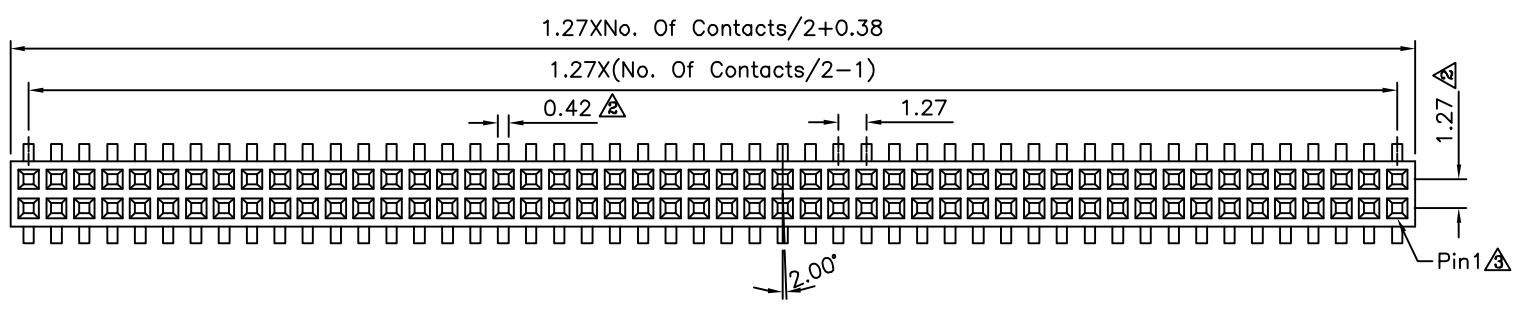


△ SPECIFICATION
 Current Rating: 1 Amp
 Insulation Resistance: 5000 Megaohms Min.
 Dielectric Withstanding: 500V AC
 Operating Temperature: -40°C ~ +105°C
 Max. Processing Temperature:
 230°C For 30~60 Seconds
 (260°C For 10 Seconds)
△ Contact: Phosphor Bronze, Gold Flash Over Nickel
△ Housing: LCP (UL94V-0), Black
 RoHS Compliant

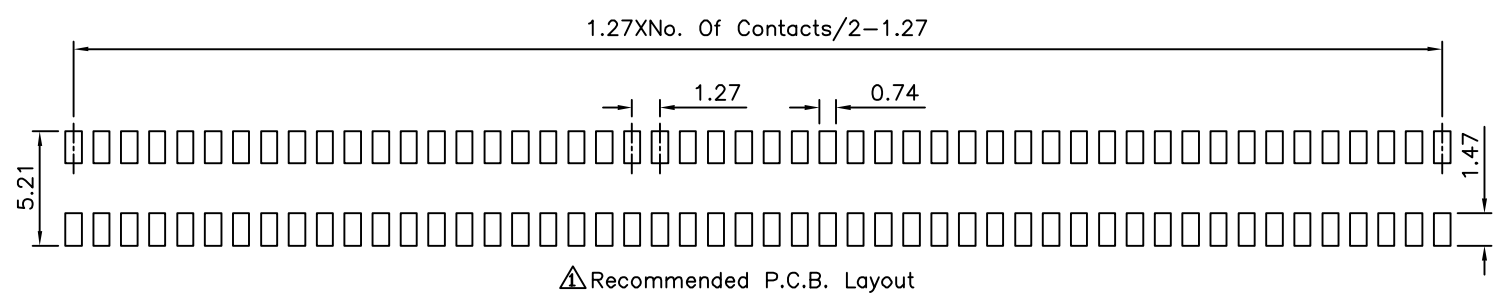

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.20 △ .X ±0.15 △ .XX ±0.10 △ .XXX ±0.05
18452		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		YBL		
SCALE	NONE	REV.	A3	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	09/26/2013
△ A2		Modify Data	HZF	04/29/2010
△ A1		Modify Data	BECKY	04/11/2006
△ A0		NEW RELEASE	BECKY	04/06/2005