

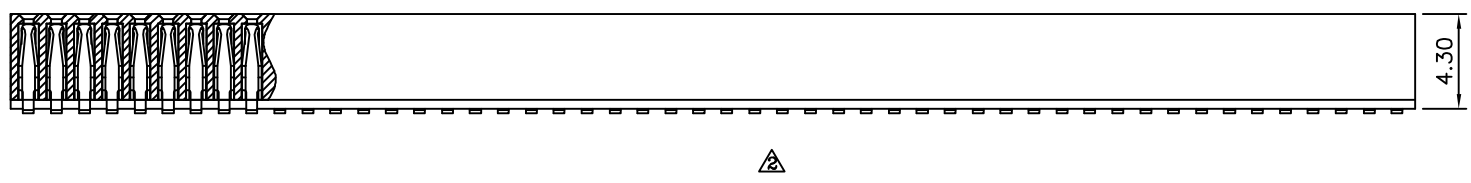
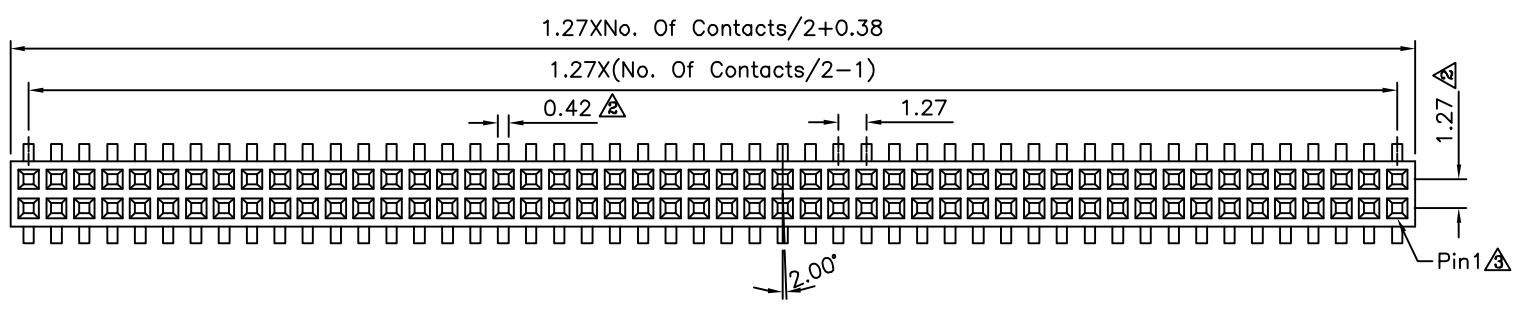


△ SPECIFICATION
 Current Rating:1 Amp
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Withstanding:500V AC
 Operating Temperature:-40°C~+105°C
 Max. Processing Temperature:
 230°C For 30~60 Seconds
 (260°C For 10 Seconds)
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
Housing:LCP(UL94V-0),Black
RoHS Compliant

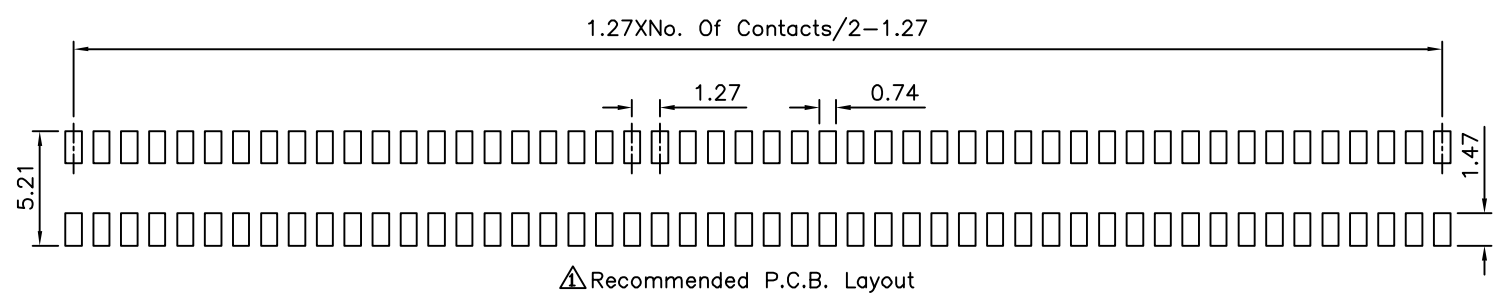

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.20 △ .X ±0.15 △ .XX ±0.10 △ .XXX ±0.05 |
| 18458 | | MEI | | |
| | | HZF | | |
| | | DRAWING BY | | UNIT |
| | | YBL | | mm |
| SCALE | NONE | REV. | A3 | |

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------|-------|------------|
| △ A3 | | Modify Data | HZF | 09/26/2013 |
| △ A2 | | Modify Data | HZF | 04/29/2010 |
| △ A1 | | Modify Data | BECKY | 04/11/2006 |
| △ A0 | | NEW RELEASE | BECKY | 04/06/2005 |