

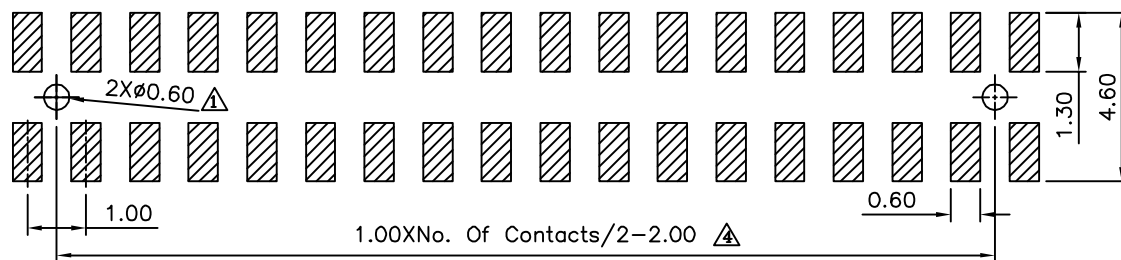



SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

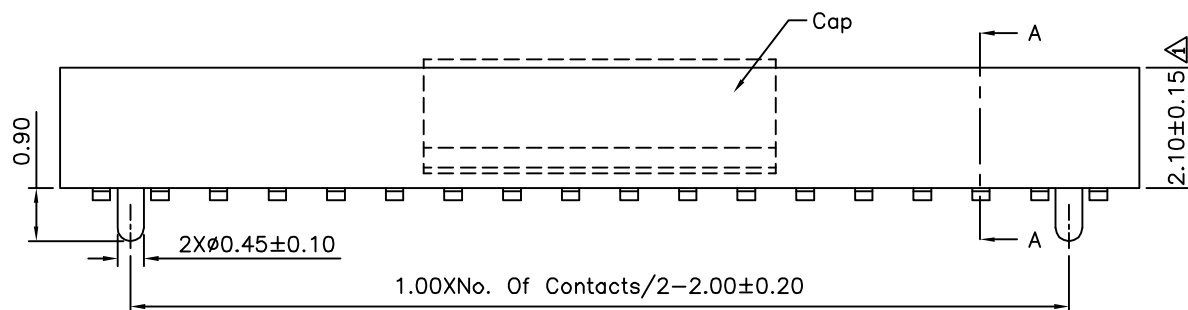

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

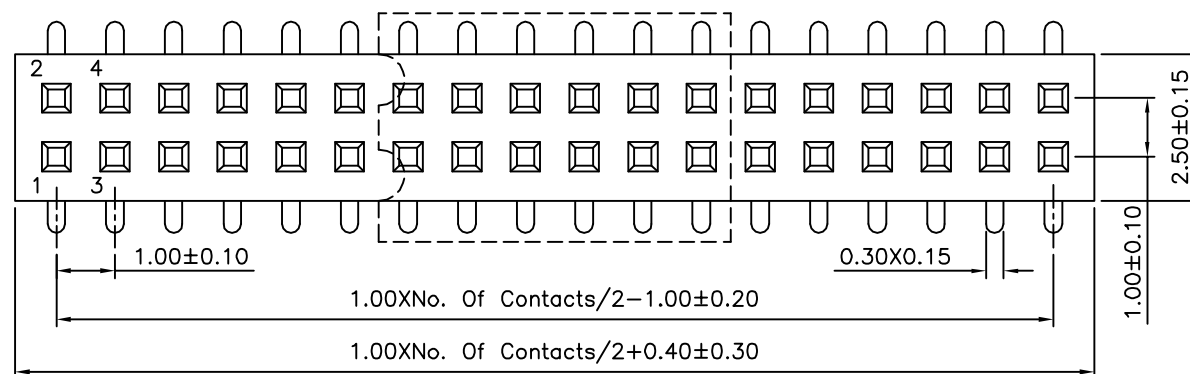

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18594

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO


REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
1	A4	Modify Data	HZF	10/11/2012
2	A3	Modify Data	HZF	05/15/2012
3	A2	Modify Data	HZF	11/11/2011
4	A1	Modify Data	HZF	10/17/2011
5	A0	NEW RELEASE	HZF	06/27/2010