

Reference P.C.B. Layout(Tolerance: ±0.10)


SPECIFICATION

- Voltage Rating: 250V AC Max.
- Current Rating: 3 Amps
- Insulation Resistance: 1000 Megohms Min. At 500V DC
- Contact Resistance: 10 Milliohms Max.
- Dielectric Withstanding Voltage: 1000V AC/Minute
- Operating Temperature: -60°C To +125°C
- Insulator: PBT, Rated UL 94V-0
- Contact: Copper Alloy
- Contact Plating: Underplate: 50u" Nickel
Contact Area: 2u" Selective Gold
Solder Tails Area: 100u" Tin

RoHS Compliant

NOTES

- 1.Retention Bends Are On The Second Pins From Both Sides In The Both Row As Shown In The Front And Side Views
- 2.Solder Tails Should Not Be Skewed By More Than 2 Degrees

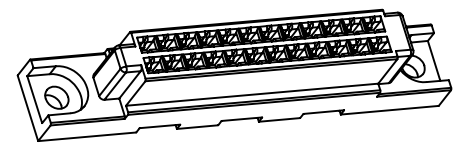

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
18770		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.38					
		LHC		.XX ±0.25					
		DRAWING BY		ANG.					
		LYS 09/19/2005							
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	LYS	09/19/2005
						NO.REV.	REVISIONS	CHK	DATE