

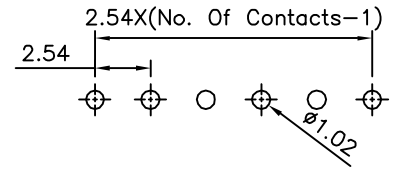
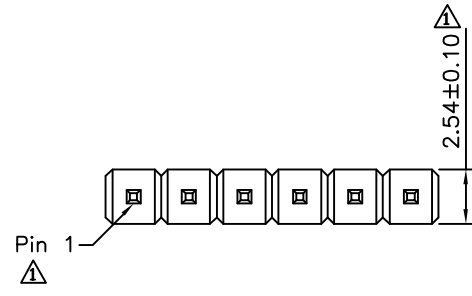


**△ SPECIFICATION**

Current:3A  
 Withstand Voltage:1000V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PBT(UL94V-0),Black  
 Contact:Copper Alloys,Gold Flash Over Nickel  
 No. Of Contacts:2~40 Contacts  
 RoHS Compliant

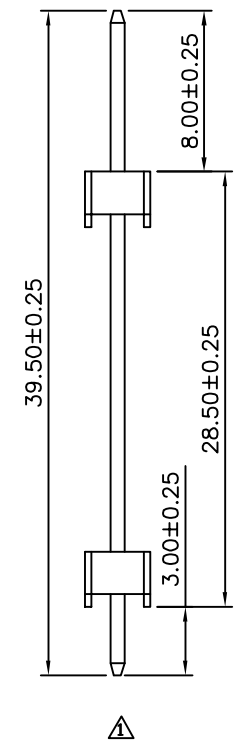

Recommended P.C.B. Layout

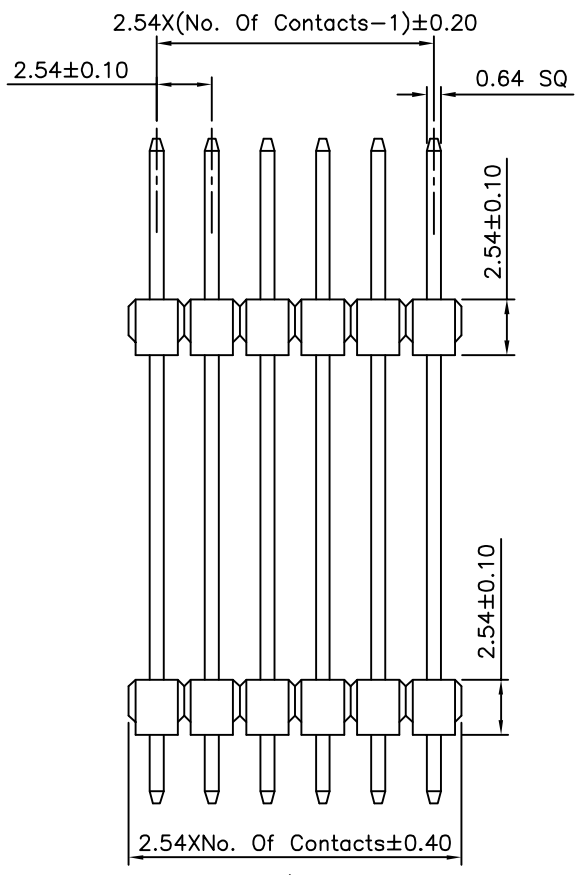

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
19155		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	08/23/2012
△ A0		NEW RELEASE	HZF	03/24/2008