
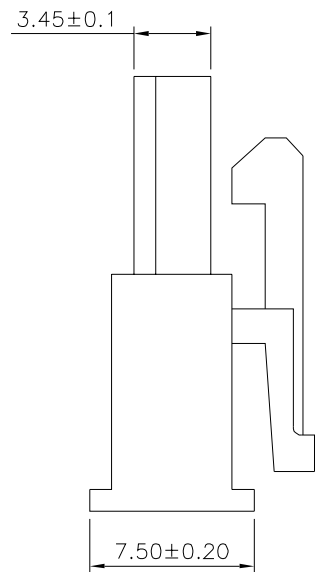
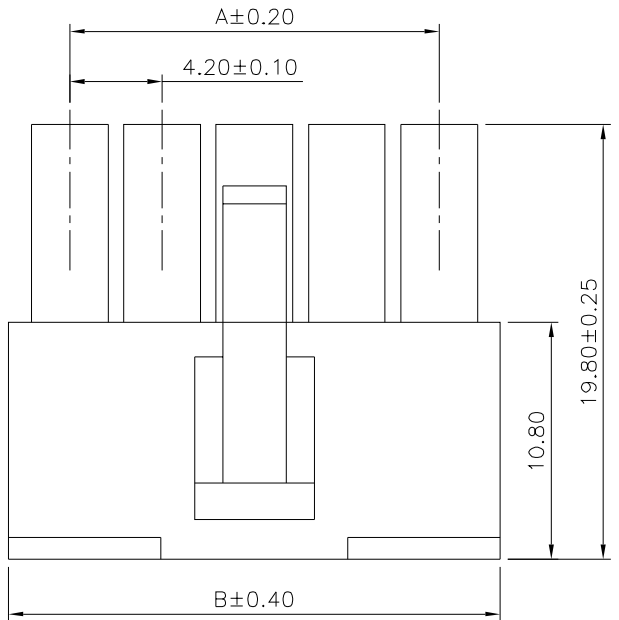


**SPECIFICATION**

Current Rating:7A AC/DC  
 Voltage Rating:250V AC/DC  
 Withstanding Voltage:1500V AC/Minute  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66,UL94V-2,Nature  
 RoHS Compliant

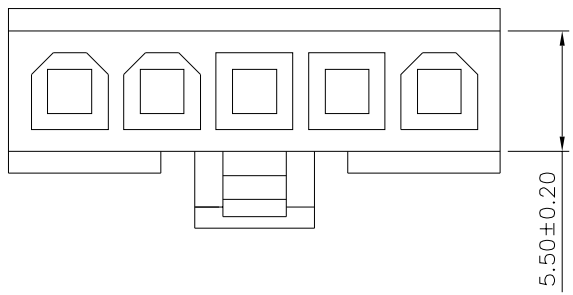


| Pin | A     | B     |
|-----|-------|-------|
| 02  | 4.20  | 9.60  |
| 03  | 8.40  | 13.80 |
| 04  | 12.60 | 18.00 |
| 05  | 16.80 | 22.20 |
| 06  | 21.00 | 26.40 |


**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |             |  |   |
|-------------|------|-------------|--|---|
| DRAWING No. |      | APPROVED BY |  | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>X. ±0.30<br>.X ±0.25<br>.XX ±0.20<br>.XXX ±0.015 |
| 19160       |      | EMILY       |  |   |
|             |      | CHECKED BY  |  |   |
| SCALE       |      | DRAWING BY  |  | UNIT  |
| NONE        | REV. | SONG        |  | mm  |
|             | A0   |             |  |   |


|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| △ A0 |      | NEW RELEASE | HZF | 08/03/2011 |




2P




3P

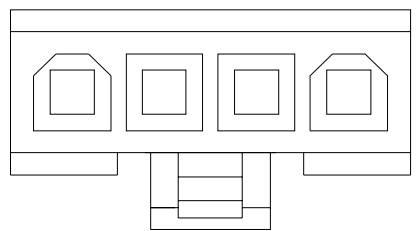

4P

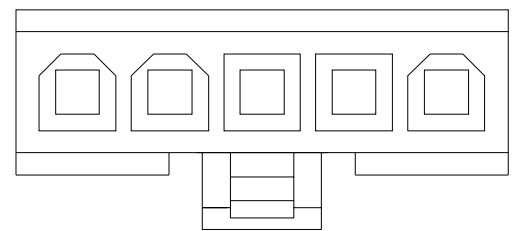

5P

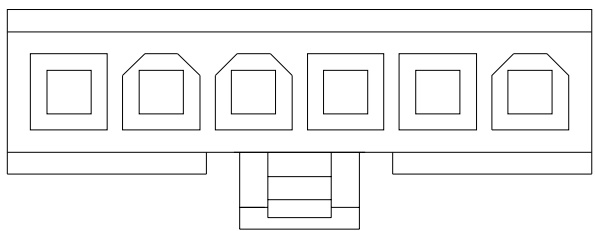

6P

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
**19160**  
SCALE NONE

APPROVED BY  
EMILY  
CHECKED BY  
HZF  
DRAWING BY  
SONG  
REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.30  
.X ±0.25  
.XX ±0.20  
.XXX ±0.015  
UNIT mm

|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| △ A0 |      | NEW RELEASE | HZF | 08/03/2011 |