
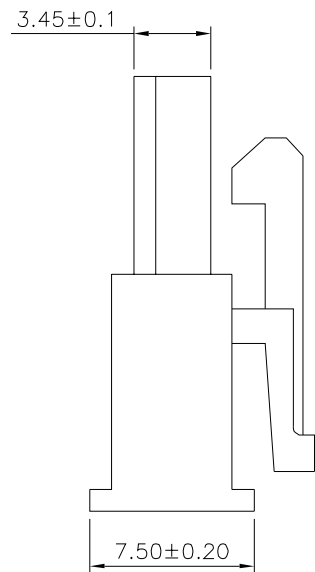
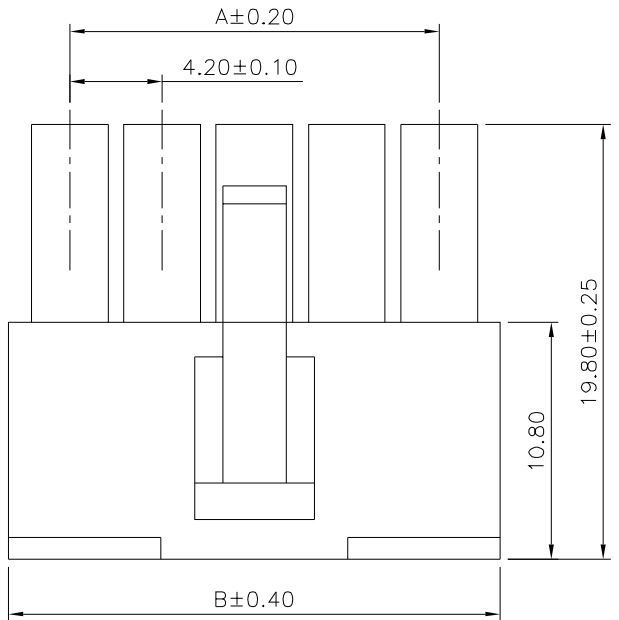


SPECIFICATION

Current Rating:7A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Material:PA66,UL94V-2,Nature
 RoHS Compliant

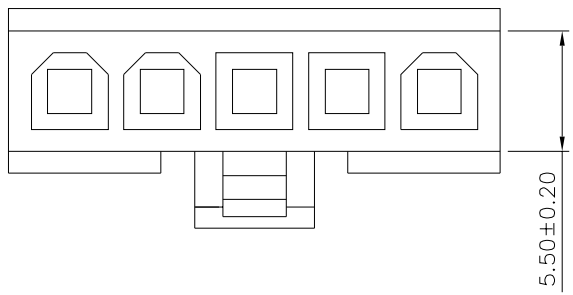


Pin	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40


4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
19162		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A0	UNIT
				mm


NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	08/03/2011




2P




3P

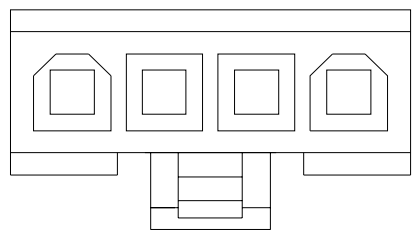

4P

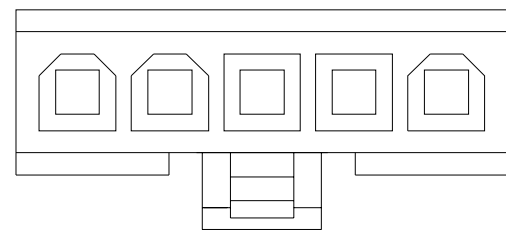

5P

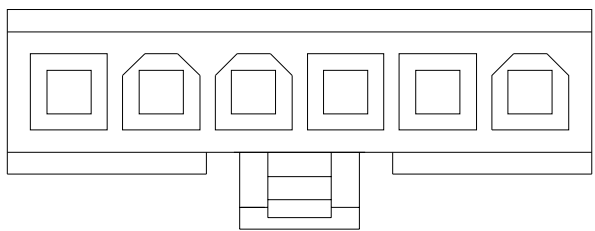

6P

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
19162
SCALE NONE

APPROVED BY EMILY
CHECKED BY HZF
DRAWING BY SONG
REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	08/03/2011