
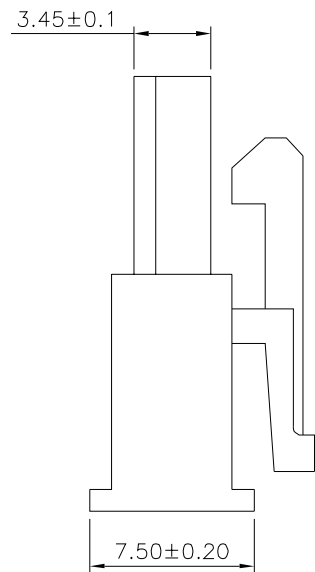
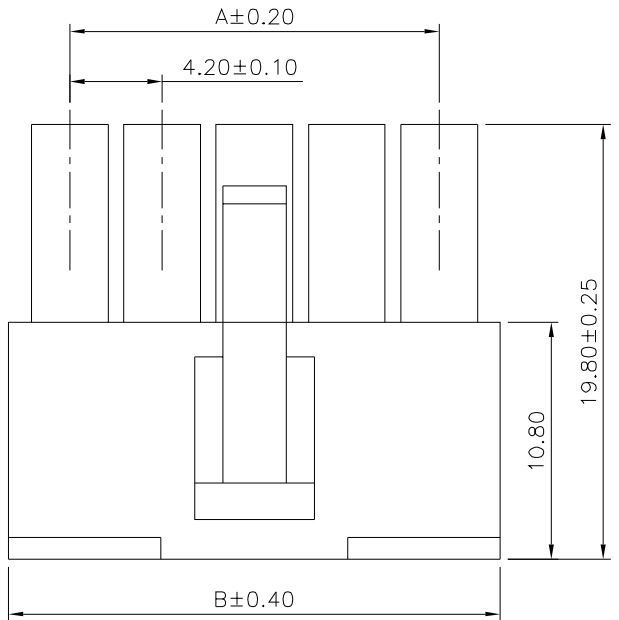


**SPECIFICATION**

Current Rating:7A AC/DC  
 Voltage Rating:250V AC/DC  
 Withstanding Voltage:1500V AC/Minute  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66,UL94V-2,Nature  
 RoHS Compliant

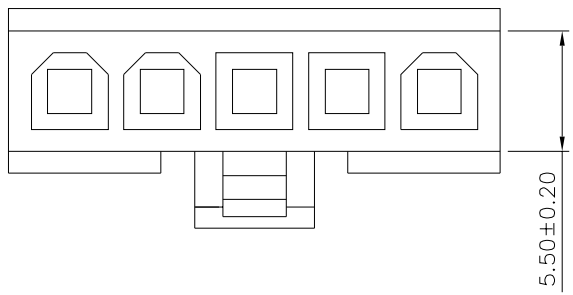


Pin	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40


**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
19163		EMILY		
		CHECKED BY		
SCALE		DRAWING BY		UNIT
NONE	REV.	SONG		mm
	A0			


NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	08/03/2011




2P




3P

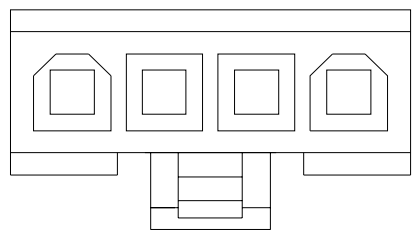

4P

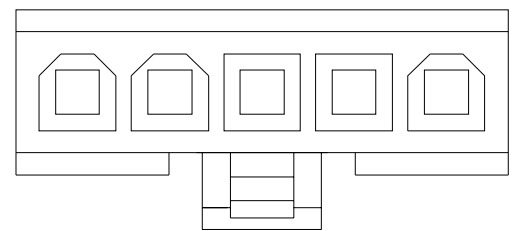

5P

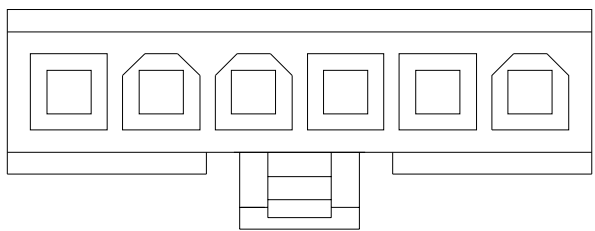

6P

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
**19163**  
SCALE NONE

APPROVED BY EMILY  
CHECKED BY HZF  
DRAWING BY SONG  
REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.30  
.X ±0.25  
.XX ±0.20  
.XXX ±0.015  
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	08/03/2011