File No.	307	SHEET	1/1

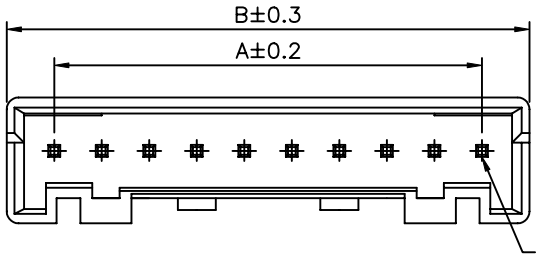

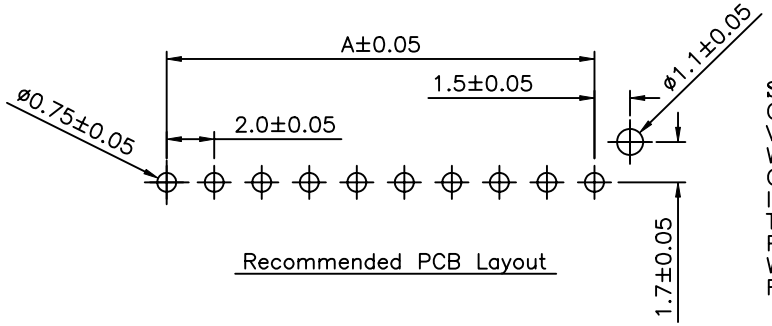

Recommended PCB Layout

SPECIFICATION
Current Rating:3A AC/DC Max AWG#22
Voltage Rating:250V AC/DC
Withstand Voltage:800V AC/Minute
Contact Resistance:20Milliohms Max
Insulation Resistance:1000Megohms Min
Temperature Range:−25°C~+85°C
Pin Material:Brass,Tin−Plated
Wafer Material:Glass−Filled PBT UL94V−0 Natural
RoHS Compliant

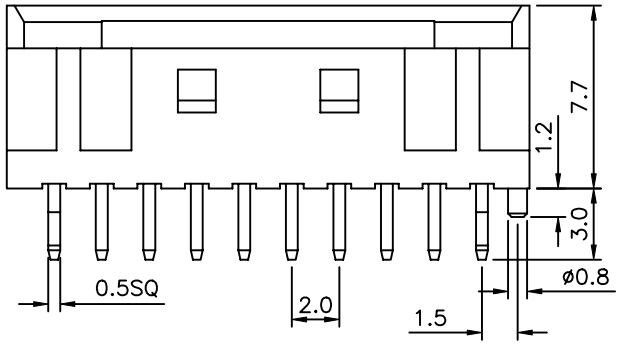

10~15 Circuits

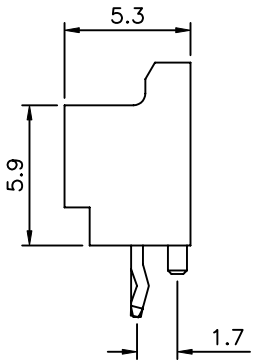





2~9 Circuits

No.	Dimension (mm)	
	A	B
2	2.0	6.0
3	4.0	8.0
4	6.0	10.0
5	8.0	12.0
6	10.0	14.0
7	12.0	16.0
8	14.0	18.0
9	16.0	20.0
10	18.0	22.0
11	20.0	24.0
12	22.0	26.0
13	24.0	28.0
14	26.0	30.0
15	28.0	32.0

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
19304	MEI	.X ±0.25				
	CHECKED BY HZF	.XX ±0.20				
	DRAWING BY HYY	ANG.				
SCALE NONE	REV. A0	UNIT mm	0	A0	NEW RELEASE	HZF 05/20/2008
			NO.	REV.	REVISIONS	CHK DATE