
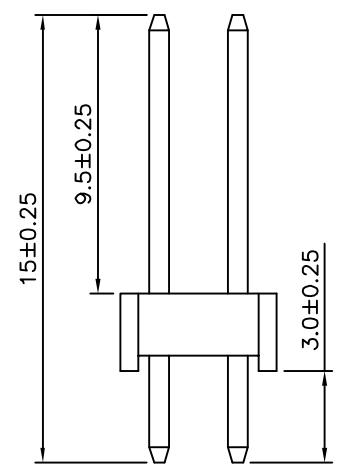
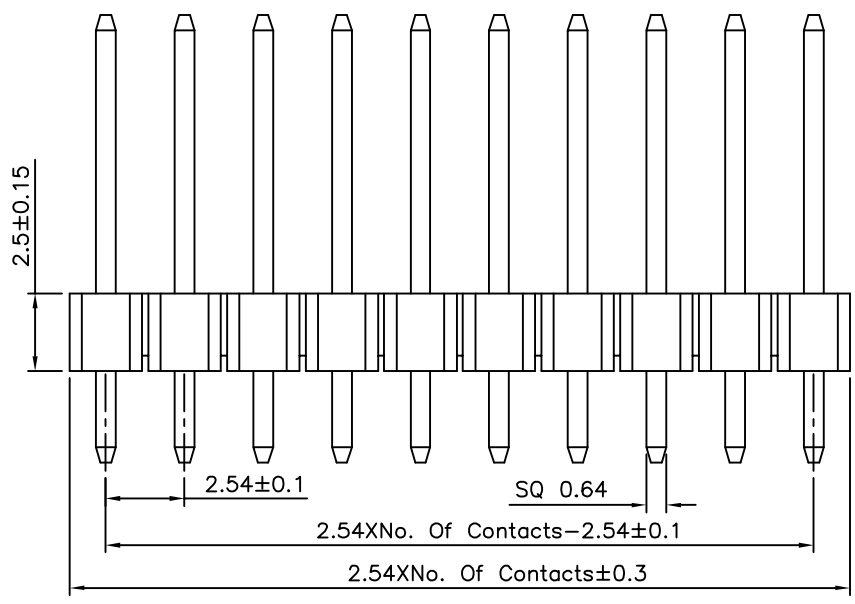


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

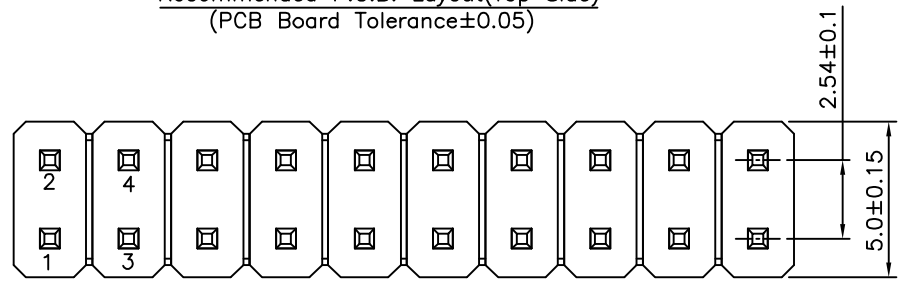

SPECIFICATION

Current Rating:3 Amps
 Withstanding Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 19355

APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 YBL
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ± 0.25 X.* $\pm 2^{\circ}$
 .X ± 0.20 .X* $\pm 1.5^{\circ}$
 .XX ± 0.15 .XX* $\pm 1^{\circ}$
 .XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$
 UNIT mm

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 05/13/2013 |

SCALE NONE