

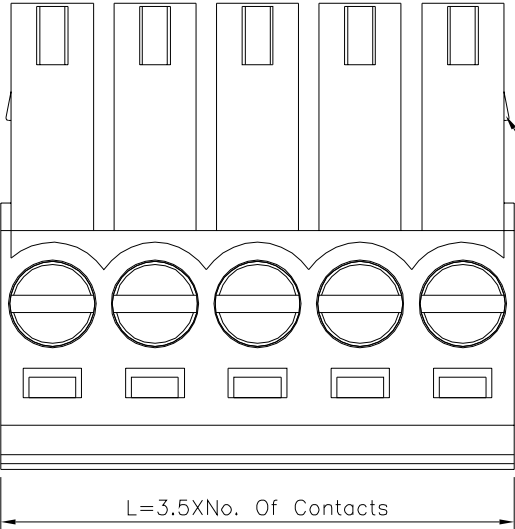


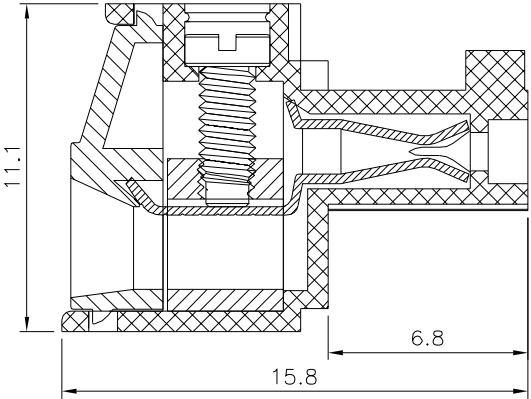

2P To 6P With Wedge,Above
7P Without Wedge(Including 7P)

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

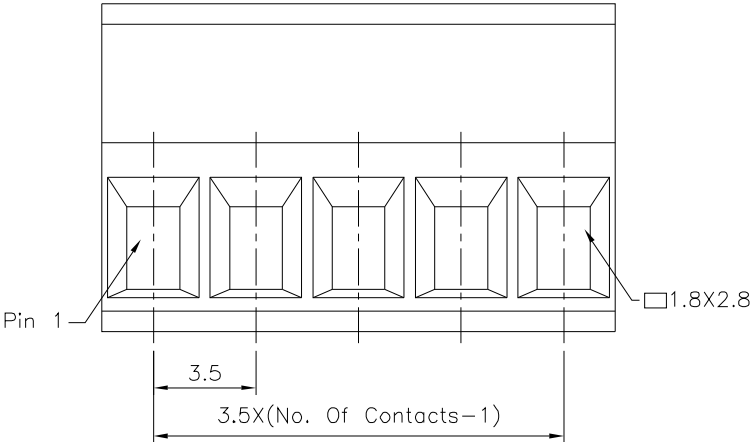

△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:12A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:1600V AC/Minute
Wire Range:16~24 AWG
Torque:2.5 Kgf.cm/M2
Operation Temperature:-40°C~+105°C
Contact:Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator Body:Polyamide(UL94V-0),Green
RoHS Compliant



△ B1	Modify Data	HZF	03/27/2026		
△ B0	NEW RELEASE	HZF	10/04/2018		
NO. REV.	REVISIONS	CHK	DATE		